

NEXIS IMPRESSO 65

170° wide-angle hinge (door thicknesses up to 26 mm)



- 170° opening angle
- Soft-close compatible
- Optimum reveals with door thicknesses up to 26 mm
- With shallow cup depth (11 mm) also suitable for soft-formed doors
- Zero protrusion with door open 90°
- Finger guard
- 3-dimensional adjustment with appropriate mounting plate

Available in 2 versions:

- With self-closing mechanism (spring)
- Without self-closing mechanism (spring) for use with Tipmatic

ORDER INFORMATION

Door overlay		Material		Cranking	with spring	Item No.	
		Cup	Arm			Impresso without tools	
Full overlay		Zamak, nickel-plated	Zamak, nickel-plated	0	■	F014072530	
					-	F014072531	
Half overlay		Zamak, nickel-plated	Zamak, nickel-plated	8	■	F014072532	
					-	F014072533	

ACCESSORIES

	Designation	Item No.		Designation	Item No.
	Tipmatic Pin for wooden/aluminium frame doors	F069068873		170° Soft-close set	F069073729
	170° Tipmatic set	F069135019		120° opening angle reduction clip, plastic, black	F069073402

Nexis Impresso mounting plates	190
Accessories	198

170° Soft-close	324
170° Tipmatic	340

Technical information	200
Assembly aids	794


INSTALLATION INFORMATION

All dimensions in millimetres

Full overlay	K0	Half overlay	K8	Inset	K0	Mitred application	K0																																																																																																																																														
<p>Mounting plate height 2</p>		<p>Mounting plate height 2</p>		<p>Inset application</p>		<p>Mitred application</p>																																																																																																																																															
<table border="1"> <thead> <tr> <th rowspan="2">Door overlay</th> <th colspan="5">Cup distance</th> </tr> <tr> <th>4</th> <th>5</th> <th>6</th> <th>7</th> <th>8</th> </tr> </thead> <tbody> <tr><td>21</td><td></td><td></td><td></td><td></td><td>0</td></tr> <tr><td>20</td><td></td><td></td><td></td><td>0</td><td></td></tr> <tr><td>19</td><td></td><td></td><td>0</td><td></td><td>2</td></tr> <tr><td>18</td><td></td><td>0</td><td></td><td>2</td><td>3</td></tr> <tr><td>17</td><td>0</td><td></td><td>2</td><td>3</td><td>4</td></tr> <tr><td>16</td><td></td><td>2</td><td>3</td><td>4</td><td></td></tr> <tr><td>15</td><td>2</td><td>3</td><td>4</td><td></td><td></td></tr> <tr><td>14</td><td>3</td><td>4</td><td></td><td></td><td></td></tr> <tr><td>13</td><td>4</td><td></td><td></td><td></td><td></td></tr> <tr> <td></td> <td colspan="5">Mounting plate height</td> </tr> </tbody> </table>		Door overlay	Cup distance					4	5	6	7	8	21					0	20				0		19			0		2	18		0		2	3	17	0		2	3	4	16		2	3	4		15	2	3	4			14	3	4				13	4						Mounting plate height					<table border="1"> <thead> <tr> <th rowspan="2">Door overlay</th> <th colspan="5">Cup distance</th> </tr> <tr> <th>4</th> <th>5</th> <th>6</th> <th>7</th> <th>8</th> </tr> </thead> <tbody> <tr><td>21</td><td></td><td></td><td></td><td></td><td>0</td></tr> <tr><td>20</td><td></td><td></td><td></td><td>0</td><td></td></tr> <tr><td>19</td><td></td><td></td><td>0</td><td></td><td>2</td></tr> <tr><td>18</td><td></td><td>0</td><td></td><td>2</td><td>3</td></tr> <tr><td>17</td><td>0</td><td></td><td>2</td><td>3</td><td>4</td></tr> <tr><td>16</td><td></td><td>2</td><td>3</td><td>4</td><td></td></tr> <tr><td>15</td><td>2</td><td>3</td><td>4</td><td></td><td></td></tr> <tr><td>14</td><td>3</td><td>4</td><td></td><td></td><td></td></tr> <tr><td>13</td><td>4</td><td></td><td></td><td></td><td></td></tr> <tr> <td></td> <td colspan="5">Mounting plate height</td> </tr> </tbody> </table>		Door overlay	Cup distance					4	5	6	7	8	21					0	20				0		19			0		2	18		0		2	3	17	0		2	3	4	16		2	3	4		15	2	3	4			14	3	4				13	4						Mounting plate height					<p>With 0 cranking, cup distance 4 mm and mounting plate height 18, the door will be inset.</p> <p>Use 120° opening angle reduction clip.</p>		<p>With 0 cranking, cup distance 3 mm and mounting plate height 18, a mitred application can be achieved.</p> <p>Use 120° opening angle reduction clip.</p>	
Door overlay	Cup distance																																																																																																																																																				
	4	5	6	7	8																																																																																																																																																
21					0																																																																																																																																																
20				0																																																																																																																																																	
19			0		2																																																																																																																																																
18		0		2	3																																																																																																																																																
17	0		2	3	4																																																																																																																																																
16		2	3	4																																																																																																																																																	
15	2	3	4																																																																																																																																																		
14	3	4																																																																																																																																																			
13	4																																																																																																																																																				
	Mounting plate height																																																																																																																																																				
Door overlay	Cup distance																																																																																																																																																				
	4	5	6	7	8																																																																																																																																																
21					0																																																																																																																																																
20				0																																																																																																																																																	
19			0		2																																																																																																																																																
18		0		2	3																																																																																																																																																
17	0		2	3	4																																																																																																																																																
16		2	3	4																																																																																																																																																	
15	2	3	4																																																																																																																																																		
14	3	4																																																																																																																																																			
13	4																																																																																																																																																				
	Mounting plate height																																																																																																																																																				



ZERO PROTRUSION

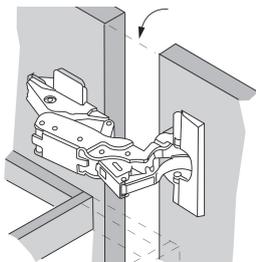

Zero protrusion for use with inset drawers.

With 0 cranking and mounting plate height 0, the door will be flush with the cabinet at 90°.

MINIMUM GAP

Door thickness	Cup distance			
	4	5	6	8
16	0.7	0.7	0.7	0.7
18	0.7	0.7	0.7	0.7
19	0.7	0.7	0.7	0.7
20	0.7	0.7	0.7	0.7
22	0.7	0.7	0.7	0.7
23	0.7	0.7	0.7	0.7
24	0.7	0.7	0.7	0.7
25	0.7	0.7	0.7	0.7
26	0.7	0.7	0.7	0.7
	Minimum gap			

MINIMUM REVEAL

Door thickness	Cup distance				
	4	5	6	7	8
16	0.0	0.0	0.0	0.0	0.0
18	0.0	0.0	0.0	0.0	0.0
19	0.0	0.0	0.0	0.0	0.0
20	0.0	0.0	0.0	0.0	0.0
22	0.0	0.0	0.0	0.0	0.0
23	0.0	0.0	0.0	0.0	0.0
24	0.7	0.7	0.7	1.8	2.0
25	6.5	6.0	5.5	4.8	4.0
26	9.5	8.5	7.5	6.5	5.5
	Minimum reveal (F)				

NOTES

The minimum gap is the clearance required between the front edge of the cabinet and the closed door so that the door can open without hindrance.


Important: Reveals were calculated for doors with a radius of 1 mm!

Hinge dimensions and reveal calculation with factory setting.

We recommend a trial fitting.

DRILLING PATTERNS

Combination drilling pattern 48/9 and 45/9.5

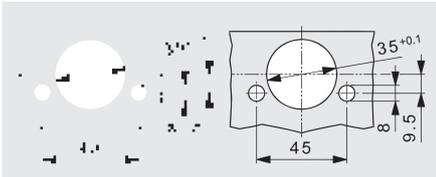

CUP DIMENSIONS

