


# Nexis Slide-on 80


180° single-joint hinge for rebated doors.



- Opening angle 180°
- With visible, nickel-plated finial
- For door thicknesses 14 to 21 mm
- With automatic hold-closed function
- 3-dimensional adjustment with suitable mounting plate

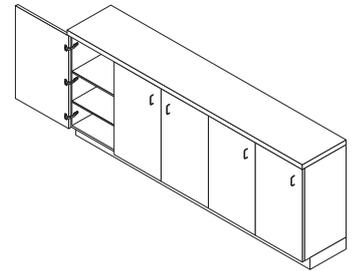

## Overlay




Hinge cup: Zamak, nickel-plated  
Hinge arm: Zamak, nickel-plated

nickel-plated  
brass, burnished

Drilling pattern	Item No.	
48/9	414.780.80.0015	
48/9	400.780.02.0013*	
	PU 125 / *PU 50	

## Overlay with finials



Hinge cup: Zamak  
Hinge arm: Zamak

nickel-plated  
brass, burnished

Drilling pattern	Item No.	
48/9	◆ 414.780.82.0015	
48/9	414.780.82.0013	
	PU 125	



Hinge cup: Zamak, nickel-plated  
Hinge arm: Zamak, nickel-plated

Drilling pattern	Item No.	
48/9	◆ 414.780.84.0015	
	PU 125	

## Cover caps



\* Steel, nickel-plated, without imprint  
\*\* Black plastic, without imprint


Item No.	
514.300.21.0215	
514.000.22.9762	
PU 1000 pieces	

- \* \*\* on request with individual company logo
- \* \*\* on request with Grass imprint
- \* on request with Grass embossed



◆ on request (minimum quantity required)

PU = packaging unit

Soft-close Pin	Page 5.16	Mounting plates	Page 3.44 - 3.47	Assembly aids	Chapter 10
				Technical information	Page 3.50 - 3.53

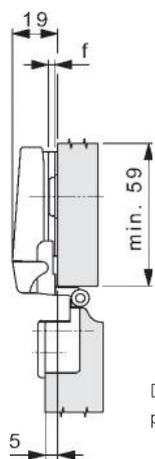

Drawings with mounting plate, height 00



Drawings with mounting plate, height 04

Nexis Impresso

Nexis Click-on

Nexis Slide-on

Snap On 3000

Soft-close

Tipmatic

illuxo

Special hinges




Cabinet accessories

Assembly aids



Index

Hinge dimensions and calculation of gap with factory setting.

Drilling patterns for screw-fix version



Cup dimensions



All dimensions in millimetres.