





Drawings with mounting plate, height 04
We recommend a trial fitting.

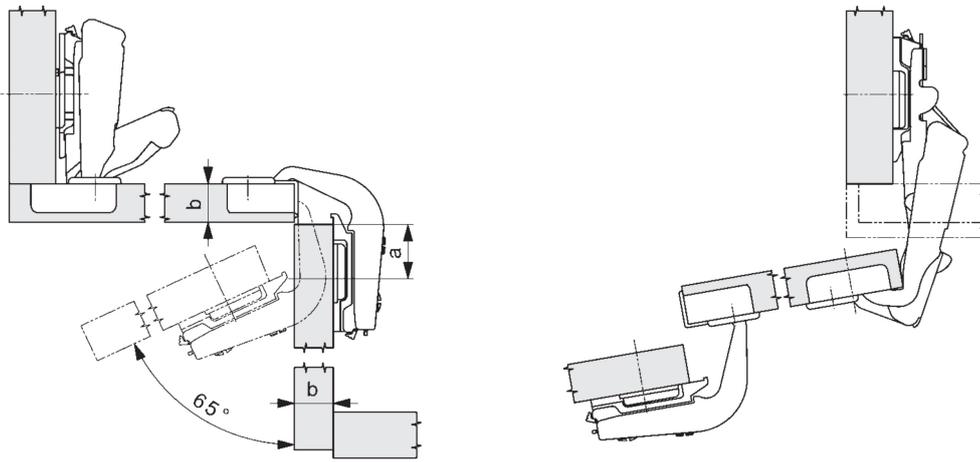


Door thickness (b)	16	17	18	19	20	21	22
Distance (a)	25	24	22	21	20	18	17
Mounting plate, height (f)	04		02			00	

Hinge dimensions with factory setting.


Drilling patterns for screw-fixing version



Drilling patterns for press-fitting version

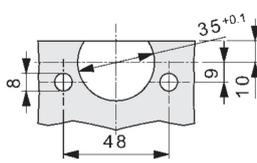

Cup dimensions

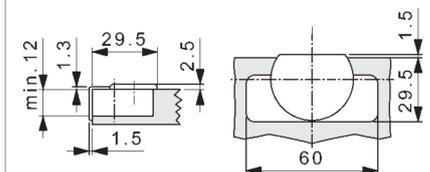

All dimensions in millimetres.

Nexis
Impresso

Nexis
Click-on

Nexis
Slide-on

Snap On
3000

Soft-close

Tipmatic

illuxo

Special
hinges

Cabinet
accessories

Assembly
aids




Index

Nexis Click-on 00

Folding door hinge with full cup recess for corner fitting.



- For connecting two corner cabinet doors
- For door thicknesses max. 24 mm, factory setting for 19 mm door thickness with cup distance 3.5 mm
- Shallow cup depth of 10.8 mm
- Self-closing
- 3-dimensional adjustment with suitable mounting plate

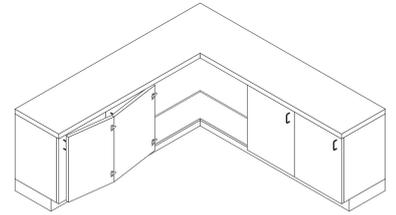

Hinge cup: Zamak, nickel-plated
Hinge arm: Zamak, nickel-plated

Drilling pattern	Item No.	Item No.
42/11	70139-10	70140-10
	PU 125 pieces	PU 125 pieces

Cover caps



* Steel, nickel-plated, without imprint
** Black plastic, without imprint



Item No.

514.300.21.0215
514.000.22.9762
PU 1000 pieces

- * ** on request with individual company logo
- * ** on request with Grass imprint
- * on request with Grass embossed

PU = packaging unit

Hinge application

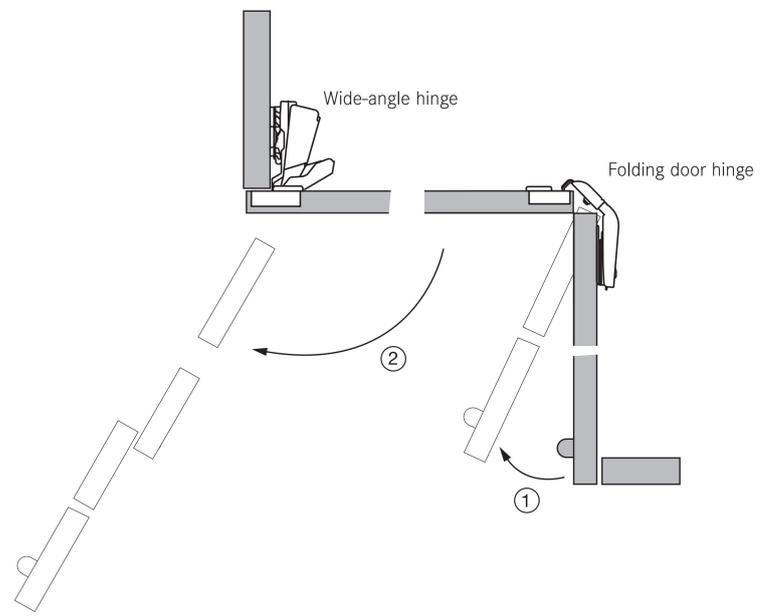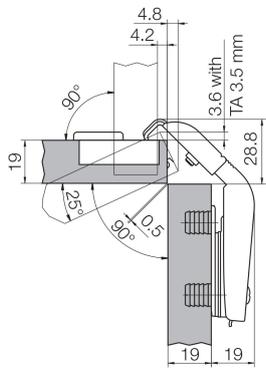

Drawings with mounting plate, height 00 for door thickness 19 mm, factory setting. We recommend a trial fitting.

Important note

Use the folding door hinge with the following mounting plates:

- With door thickness 19 mm:** 314.493.71.0015 (page 63)
 318.493.71.0015 (page 63)
 314.393.81.0015 (page 66)
 318.393.81.0015 (page 66)

- With door thickness 16 mm:** 344.493.82.0315 (page 63)
 348.493.82.0315 (page 63)
 344.393.82.0315 (page 66)
 348.393.82.0315 (page 66)


Adjustments

Adjustment in the hinge arm

1. Side adjustment ± 2 mm
2. Depth adjustment ± 2 mm
4. Door thickness 14 to 24 mm, factory setting 19 mm




Adjustment via mounting plate

3. Height adjustment ± 2 mm

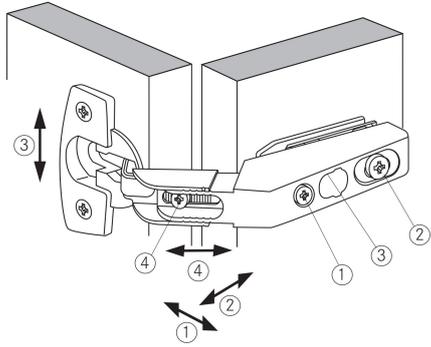

Hinge dimensions with factory setting.

Drilling patterns for screw-fixing version	Drilling patterns for press-fitting version	Cup dimensions
--	---	----------------

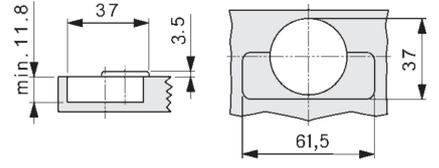

All dimensions in millimetres.

- Nexis Impresso
- Nexis Click-on**
- Nexis Slide-on
- Snap On 3000
- Soft-close
- Tipmatic
- illuxo
- Special hinges
- Cabinet accessories
- Assembly aids
- Index