

# SOFT-CLOSE IMPRESSO

For Nexis Impresso 95°, 100°, 110° and 125° hinges



- Tool-free installation – can also be retrofitted
- No additional drilling of the cabinet or door
- Damping levels can be individually adjusted
- Damping system to be used with hinges from the Nexis Impresso series

## ORDER INFORMATION

2

Soft-close Impresso set	Item No.
<p><b>1 set includes:</b></p> <ul style="list-style-type: none"> <li>• 1 Soft-close adapter for Nexis Impresso hinges</li> <li>• 1 Soft-close damper</li> <li>• 2 cover caps</li> </ul>	<p><b>F069073728</b></p>
Soft-close Impresso adapter	Item No.
<ul style="list-style-type: none"> <li>• Soft-close Impresso adapter for Nexis Impresso hinges</li> </ul>	<p><b>F069073726</b></p>
Soft-close damper	Item No.
<ul style="list-style-type: none"> <li>• Soft-close damper for Soft-close Impresso adapter</li> </ul>	<p><b>F069073701</b></p>

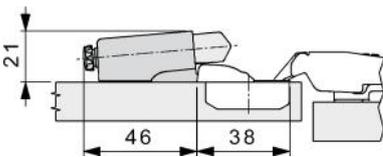
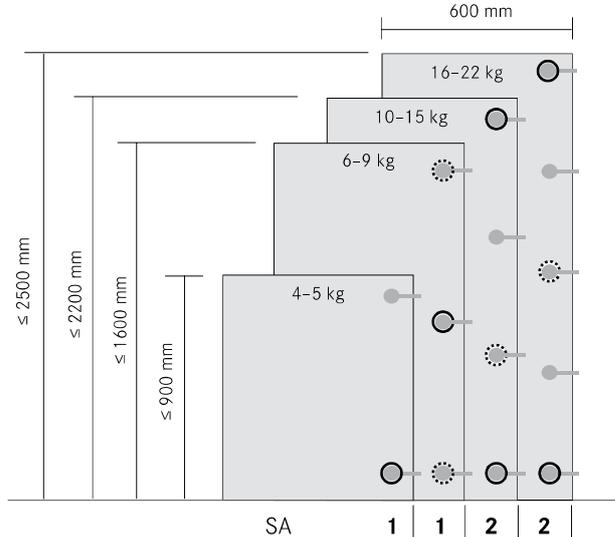
## COVER CAPS

	Designation	Cranking	Imprinted/ Embossed	Item No.
	Hinge arm cover cap, steel, short, nickel-plated, not imprinted, Soft-close compatible	0	On request	<b>F069073570</b>
	Hinge arm cover cap, steel, open, nickel-plated, not imprinted, Soft-close compatible	8/15	On request	<b>F069073669</b>

Nexis Impresso	180


**INSTALLATION INFORMATION**

All dimensions in millimetres

Dimensions	Position for Soft-close Impresso
	 <p style="text-align: center;"> <span style="border: 1px solid black; border-radius: 50%; padding: 2px;">○</span> Recommended position for Soft-close Impresso  <span style="border: 1px dashed black; border-radius: 50%; padding: 2px;">○</span> Position for additional Soft-close Impresso (if required)         </p>

Installation	Soft-close Impresso - quick and easy to fit
<div style="display: flex; flex-wrap: wrap;"> <div style="width: 50%; text-align: center;">1 </div> <div style="width: 50%; text-align: center;">2 </div> <div style="width: 50%; text-align: center;">3 </div> <div style="width: 50%; text-align: center;">4 </div> <div style="width: 50%; text-align: center;">5 </div> <div style="width: 50%; text-align: center;">6 </div> </div>	<p>1 Remove door from cabinet and open hinge cup cover.</p> <p>2 Place Soft-close Impresso adapter level onto both matching parts in the hinge cup, ensure proper fit and press down firmly.</p> <p>3 Close hinge cup cover and press down fully. Adapter must make full contact with the door.</p> <p>4 Fully insert damper into the adapter opening, with the flat side facing downwards.</p> <p>5 Re-hang the door and, if required, adjust the damping level via the adjustment screw.</p> <p>6 If not already in place, fit the short hinge arm cover cap (supplied with the set).</p> <p><b>NOTES</b></p> <p>When fitting Grass furniture hardware, the installation instructions supplied with the applicable sales literature must be observed in detail, otherwise the company cannot accept liability.</p> <p>If you require further information relating to installation and assembly, please contact one of our factories directly.</p> <p>We thank you for your understanding.</p>

**LEGEND**

<b>SA</b>	Number of hinges	
-----------	------------------	--



# SOFT-CLOSE CLICK-ON

For Nexis Click-on and Slide-on 95°, 100°, 110° and 125° hinges



- Tool-free installation – can also be retrofitted
- No additional drilling of the cabinet or door
- Damping levels can be individually adjusted
- Damping system to be used with hinges from the Nexis Click-on and Nexis Slide-on series

## ORDER INFORMATION

2

Soft-close Click-on set	Item No.
<p><b>1 set includes:</b></p> <ul style="list-style-type: none"> <li>• 1 Soft-close adapter with pre-assembled Soft-close damper for Nexis Click-on and Nexis Slide-on hinges</li> <li>• 1 hinge cup cover cap</li> <li>• 2 cover caps</li> </ul>	
	<b>F069073714</b>

Soft-close adapter	Item No.
<ul style="list-style-type: none"> <li>• Soft-close adapter incl. pre-assembled Soft-close damper for Nexis Click-on and Nexis Slide-on hinges</li> </ul>	
	<b>F069073715</b>

## COVER CAPS

	Designation	Cranking	Imprinted / Embossed	Item No.
	Hinge arm cover cap, steel, short, nickel-plated, not imprinted, Soft-close compatible	0	On request	<b>F069073570</b>
	Hinge arm cover cap, steel, open, nickel-plated, not imprinted, Soft-close compatible	8 / 15	On request	<b>F069073669</b>

## ACCESSORIES

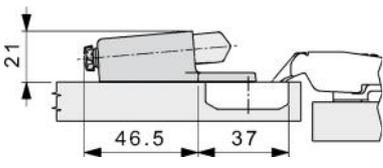
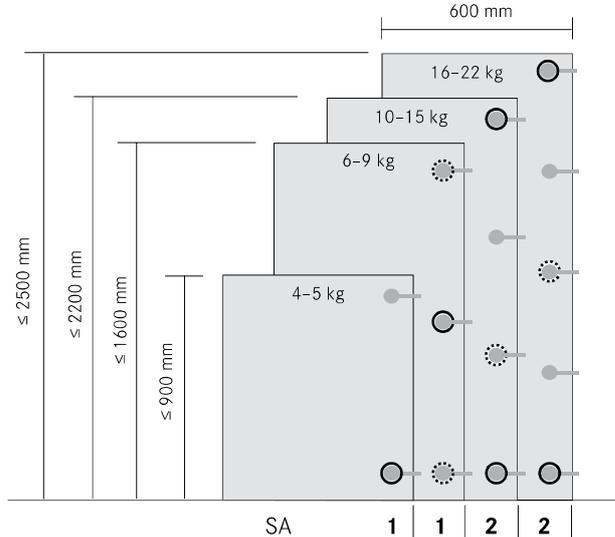
	Designation	Item No.
	Hinge cup cover cap, steel, nickel-plated, not imprinted	<b>F069073687</b>

	Designation	Item No.

Nexis Click-on 224

**INSTALLATION INFORMATION**

All dimensions in millimetres

Dimensions	Position for Soft-close Click-on
	 <p style="text-align: center;"> <span style="display: inline-block; width: 10px; height: 10px; border: 1px solid black; border-radius: 50%; margin-right: 5px;"></span> Recommended position for Soft-close Click-on  <span style="display: inline-block; width: 10px; height: 10px; border: 1px dashed black; border-radius: 50%; margin-right: 5px;"></span> Position for additional Soft-close Click-on (if required)         </p>



Installation	Soft-close Click-on - quick and easy to fit
<div style="display: flex; justify-content: space-around;"> <div style="text-align: center;"> <p>1</p>  </div> <div style="text-align: center;"> <p>2</p>  </div> <div style="text-align: center;"> <p>3</p>  </div> </div> <div style="display: flex; justify-content: space-around; margin-top: 10px;"> <div style="text-align: center;"> <p>4</p>  </div> <div style="text-align: center;"> <p>5</p>  </div> <div style="text-align: center;"> <p>6</p>  </div> </div> <div style="text-align: center; margin-top: 20px;">  </div>	<p>Soft-close Click-on - quick and easy to fit</p> <ol style="list-style-type: none"> <li>1 Hinges with 0 cranking: remove hinge arm cover cap (if fitted).</li> <li>2 Insert Soft-close Click-on adapter, engaging the two small hooks at a slight angle in the recesses underneath the hinge cup.</li> <li>3 Press down both sides of the adapter simultaneously, until it engages with an audible click.</li> <li>4 If required, fit short hinge arm cover cap (supplied with the set).</li> <li>5 If required, the adjustment screw can be used to finely adjust the Soft-close Click-on to different opening angles and cranking.</li> <li>6 The cover cap (supplied with the set) for hinges without Soft-close Click-on or Slide-on is used to ensure a uniform appearance.</li> </ol> <p style="margin-top: 20px;"><b>NOTES</b></p> <p>When fitting Grass furniture hardware, the installation instructions supplied with the applicable sales literature must be observed in detail, otherwise the company cannot accept liability.</p> <p>If you require further information relating to installation and assembly, please contact one of our factories directly.</p> <p>We thank you for your understanding.</p>

**LEGEND**

<b>SA</b>	Number of hinges	
-----------	------------------	--

# 170° SOFT-CLOSE

For Nexis wide-angle hinges 170°



- For Nexis Impresso, Nexis Click-on and Nexis Slide-on 170° wide-angle hinges
- Tool-free installation – can also be retrofitted
- No additional drilling of the cabinet or door
- Damping levels can be individually adjusted

## ORDER INFORMATION

2

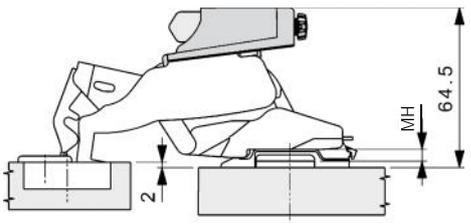
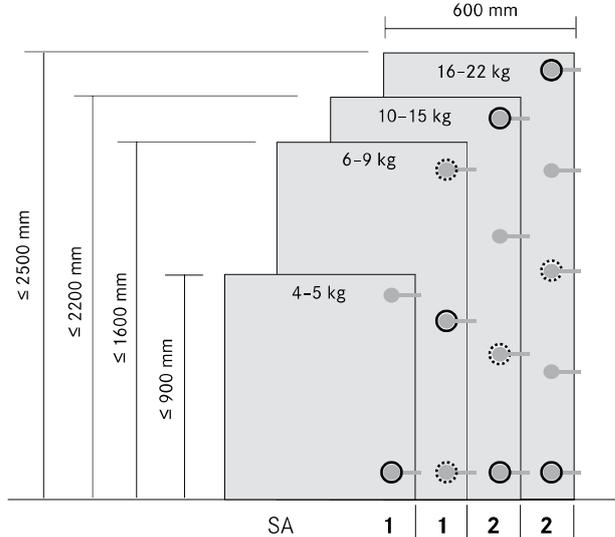
170° Soft-close		Item No.
<ul style="list-style-type: none"> <li>• Soft-close adapter for Nexis Impresso, Nexis Click-on and Nexis Slide-on 170° wide-angle hinge with pre-assembled Soft-close damper</li> </ul>		<p><b>F069073729</b></p>

Nexis Impresso	180
Nexis Click-on	224

Nexis Slide-on	288


**INSTALLATION INFORMATION**

All dimensions in millimetres

Dimensions	Position for 170° Soft-close
 <p style="text-align: right; margin-top: 10px;">Drawing with mounting plate height 2</p>	 <p style="text-align: center; margin-top: 10px;">SA    1    1    2    2</p> <p style="text-align: right; margin-top: 10px;"> <span style="display: inline-block; width: 10px; height: 10px; border: 1px solid black; border-radius: 50%;"></span> Recommended position for Soft-close 170°  <span style="display: inline-block; width: 10px; height: 10px; border: 1px dashed black; border-radius: 50%;"></span> Position for additional Soft-close 170° (if required)         </p>



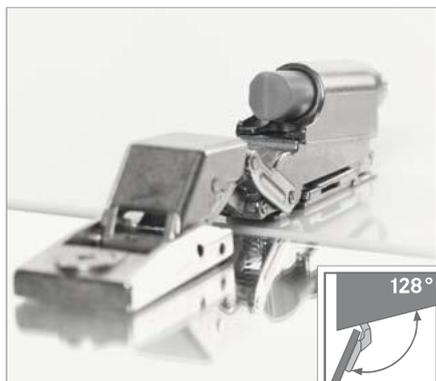
Installation	170° Soft-close - quick and easy to fit
<div style="display: flex; justify-content: space-around;"> <div style="text-align: center;"> <p>1</p>  </div> <div style="text-align: center;"> <p>2</p>  </div> </div>	<ol style="list-style-type: none"> <li>1 Insert 170° Soft-close adapter, engaging the two small hooks at a slight angle in the recesses underneath the hinge arm.</li> <li>2 Press down adapter until it engages with an audible click.</li> </ol> <p style="margin-top: 20px;"><b>NOTES</b></p> <p>When fitting Grass furniture hardware, the installation instructions supplied with the applicable sales literature must be observed in detail, otherwise the company cannot accept liability.</p> <p>If you require further information relating to installation and assembly, please contact one of our factories directly.</p> <p>We thank you for your understanding.</p>

**LEGEND**

<b>MH</b>	Mounting plate height
<b>SA</b>	Number of hinges

# SOFT-CLOSE MIRRO


For Nexis Click-on Mirro hinges



- For Nexis Click-on Mirro and Mirro -15° hinges
- Tool-free installation – can also be retrofitted
- No additional drilling of the cabinet
- Damping levels can be individually adjusted

## ORDER INFORMATION

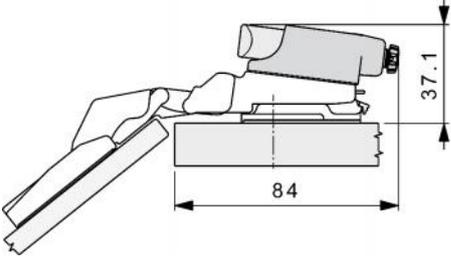
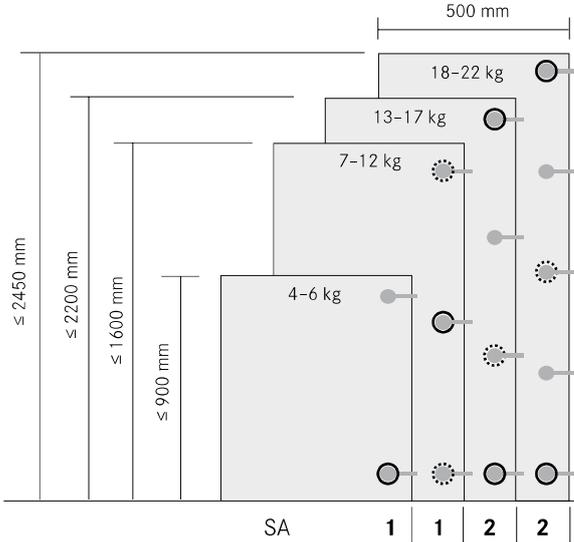
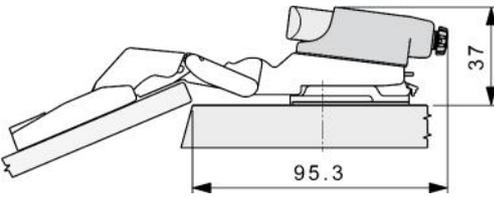
2

Soft-close Mirro	Item No.
<ul style="list-style-type: none"> <li>• Soft-close adapter with pre-assembled Soft-close damper for Nexis Click-on Mirro and Mirro -15° hinges</li> </ul> 	<p><b>F069073711</b></p>

Nexis Slide-on	288
Nexis Click-on Mirro 07/-15	270


INSTALLATION INFORMATION

All dimensions in millimetres

Mirro dimensions	Position for Soft-close Mirro
 <p>Drawing with mounting plate height 2</p>	 <p>○ Recommended position for Soft-close Mirro ⊙ Position for additional Soft-close Mirro (if required)</p>
<p>Mirro -15° dimensions</p>  <p>Drawing with mounting plate height 2</p>	

2

Installation	Soft-close Mirro - quick and easy to fit
<p>1</p>  <p>2</p> 	<p>1 Insert Soft-close Mirro adapter engaging the hook into the recess underneath the hinge arm. 2 Push the adapter back until it engages with an audible click.</p> <p><b>NOTES</b></p> <p>When fitting Grass furniture hardware, the installation instructions supplied with the applicable sales literature must be observed in detail, otherwise the company cannot accept liability.</p> <p>If you require further information relating to installation and assembly, please contact one of our factories directly.</p> <p>We thank you for your understanding.</p>

LEGEND

SA	Number of hinges	

# SOFT-CLOSE ACC


For wooden and aluminium frame doors



- For wooden frame doors
- For aluminium frame doors
- Damping levels can be individually adjusted
- Easy to fit
- Not visible from the outside
- Elegant design

## ORDER INFORMATION

2

Soft-close ACC	Item No.
<ul style="list-style-type: none"> <li>• Soft-close ACC damping system with pre-assembled Soft-close damper for inserting in wooden and aluminium frames</li> </ul> 	<b>F069073705</b>

Counterpart, universal	Item No.
<ul style="list-style-type: none"> <li>• Use for all cranking versions</li> <li>• Zamak, nickel-plated</li> </ul> 	<b>F069073387</b>

## COVER CAP

	Designation	Imprinted/ Embossed	Item No.
	ACC hinge arm cover cap, nickel-plated, not imprinted	-	<b>F069073546</b>

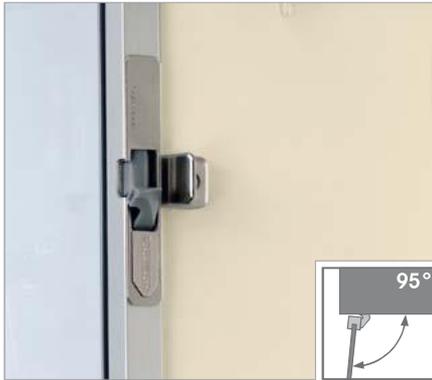
Nexis Impresso	180
Nexis Click-on	224

Nexis Slide-on	288
Special hinges	369




# SOFT-CLOSE AL


For aluminium frame doors




- For aluminium frame doors with 95° hinge
- For 20 x 20 mm aluminium frame
- Damping levels can be individually adjusted
- Easy to fit
- Not visible from the outside
- Elegant design

## ORDER INFORMATION

2

Soft-close AL compatible	Item No.
<ul style="list-style-type: none"> <li>• Soft-close AL with pre-assembled Soft-close damper for installation in aluminium frame</li> </ul> 	<b>F069073710</b>

Counterpart, universal	Item No.
<ul style="list-style-type: none"> <li>• Use for all cranking versions</li> <li>• Zamak, nickel-plated</li> </ul> 	<b>F069073387</b>

Counterpart	Item No.
<ul style="list-style-type: none"> <li>• Only to be used with 0 cranking</li> <li>• Steel, nickel-plated</li> </ul> 	<b>F069073388</b>

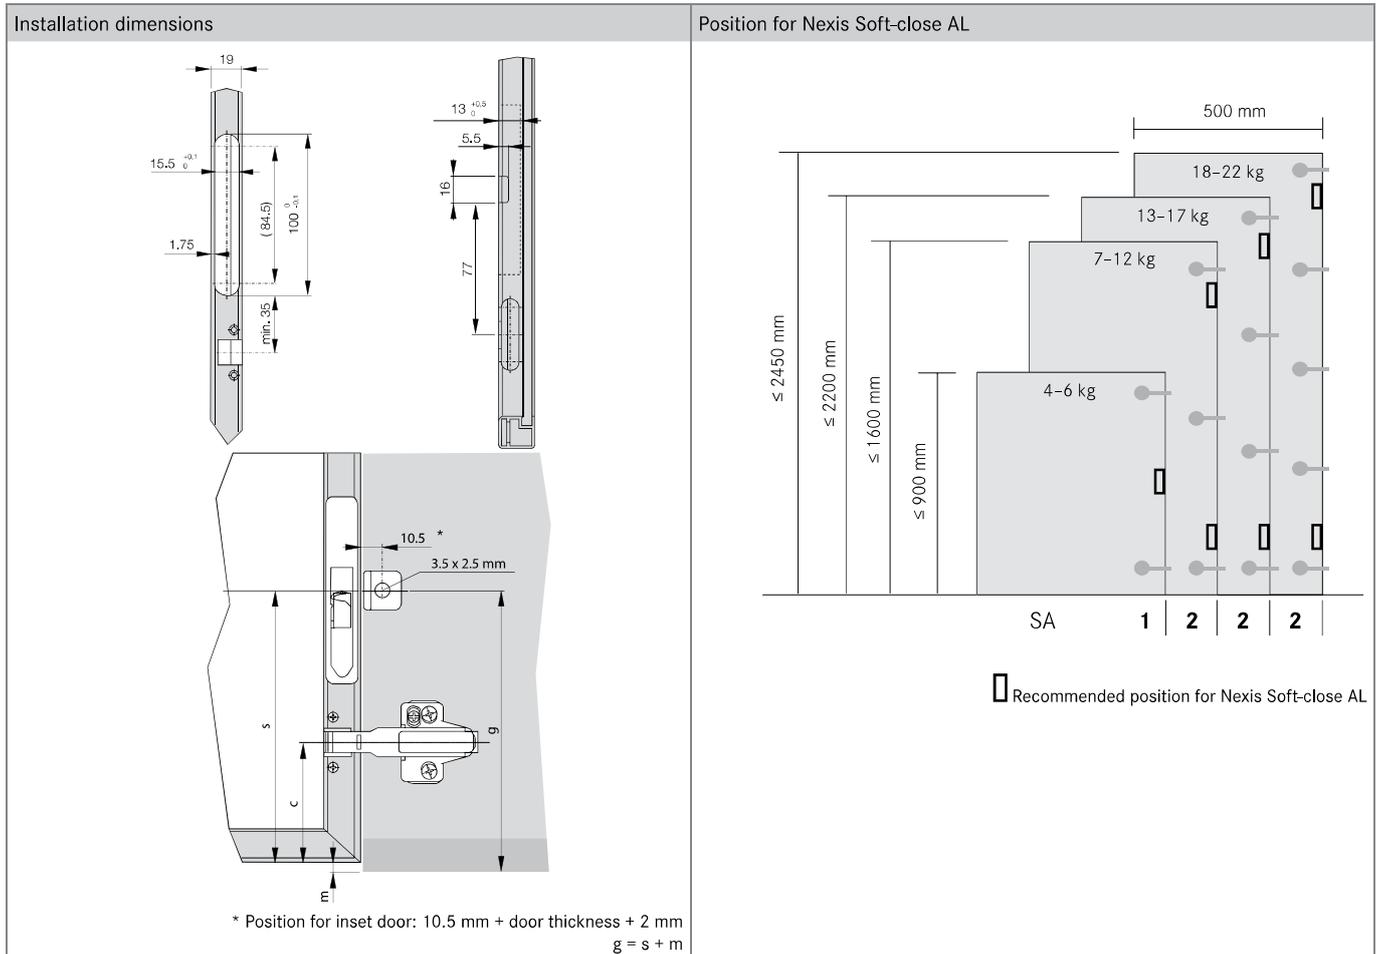
## COVER CAP

	Designation	Imprinted/ Embossed	Item No.
	AL hinge arm cover cap, nickel-plated, not imprinted	-	<b>F069073546</b>

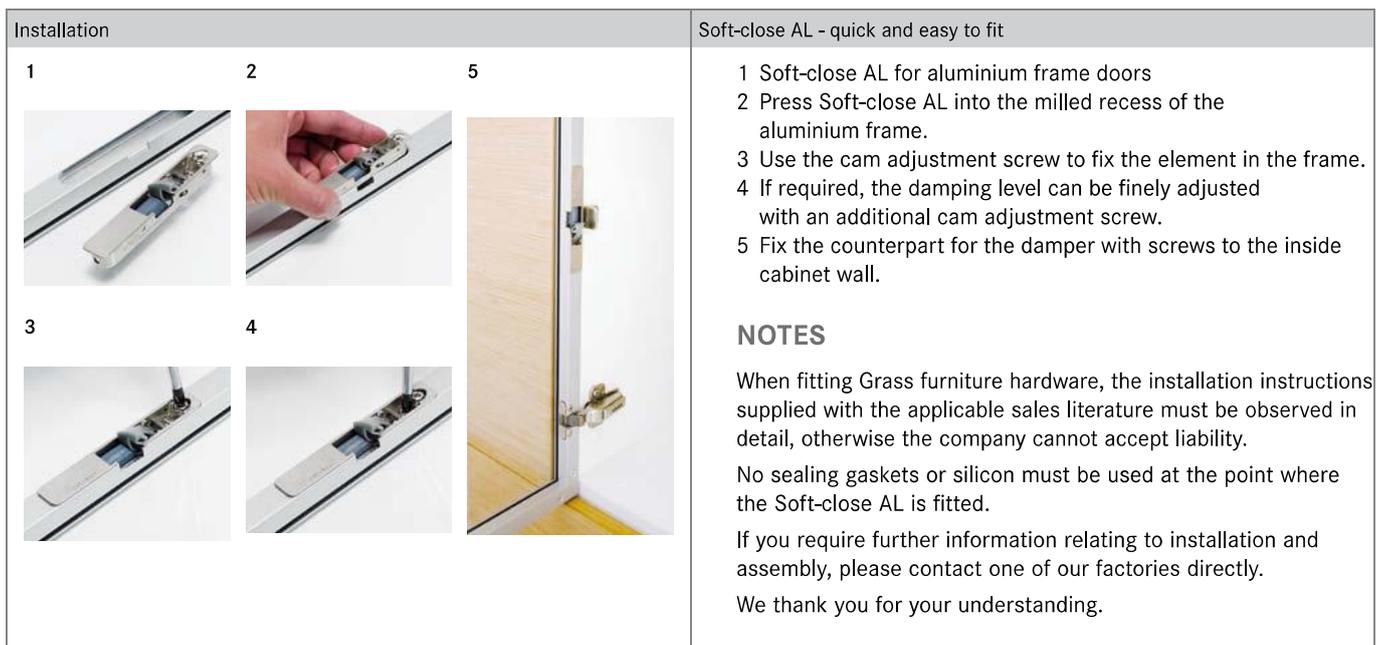
Nexis Click-on 17 AL	262		
Nexis Slide-on 17 AL	322		

INSTALLATION INFORMATION

All dimensions in millimetres



2



LEGEND

SA	Number of hinges	








# SOFT-CLOSE PIN

Pneumatic damper for doors



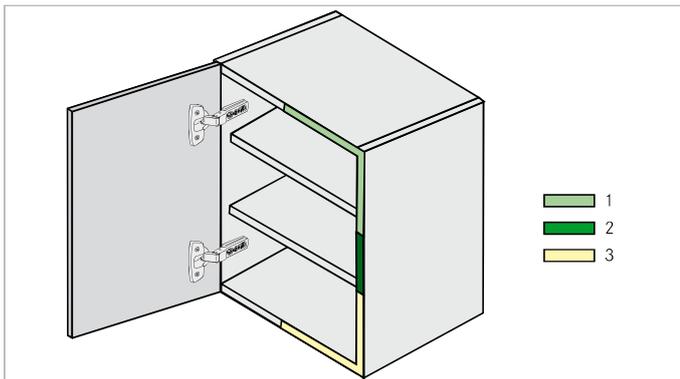
- Suitable for all door sizes, shapes and materials
- Can also be retrofitted
- For insertion into a drill hole or for fitting with adapter plate

## ORDER INFORMATION

Soft-close Pin	For drilling	Item No.
<ul style="list-style-type: none"> <li>• Hole drilled into cabinet front edge</li> <li>• For perfect appearance</li> <li>• Housing: plastic, anthracite</li> <li>• Piston: light grey</li> </ul> 		<b>F069066528</b>
Adapter plate for line hole drilling	For Euro screws	Item No.
<ul style="list-style-type: none"> <li>• Suitable for hole spacing 28 mm and 37 mm</li> <li>• Fixing with Euro screws (6.3 x 13.5)</li> <li>• Plastic, light grey</li> </ul> 		<b>F069063310</b>
Frame adapter plate	For screw fixing	Item No.
<ul style="list-style-type: none"> <li>• For quick retrofit installation</li> <li>• Fixing with wood screws (3.5 x 13)</li> <li>• Plastic, light grey</li> </ul> 		<b>F069073697</b>
Linear adapter plate	For screw fixing	Item No.
<ul style="list-style-type: none"> <li>• Design solution – also in conjunction with inset doors</li> <li>• Fixing with wood screws (3.5 x 13)</li> <li>• Plastic, light grey</li> </ul> 		<b>F069073696</b>

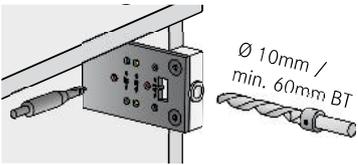


Nexis Impresso	180
Nexis Click-on	224

Nexis Slide-on	288
Special hinges	369

- Possible damper positions when fitting to a standard door:
  - 1 good position
  - 2 optimum position
  - 3 possible position
- For larger doors we recommend the installation of an additional damper.

## ORDER INFORMATION

Drilling jig for adapter plates and drill-in damper	Item No.
<ul style="list-style-type: none"> <li>• The Grass drilling jig for Soft-close can be used for drilling all adapter plate versions and the drill-in damper</li> <li>• <b>Note:</b> Drill bits are not supplied!</li> </ul>	 <p>Ø 10mm / min. 60mm BT</p> <p><b>F146095470</b></p>
Pilot drill bit	Item No.
<ul style="list-style-type: none"> <li>• Ø 3.5 mm</li> </ul>	 <p><b>F146035692</b></p>
Pilot drill bit with stop ring	Item No.
<ul style="list-style-type: none"> <li>• Ø 10 mm</li> </ul>	 <p><b>F146038823</b></p>

2

## LEGEND

BT	Drilling depth	
----	----------------	--