




2

Switches/Sockets 230 V

Switch and socket system

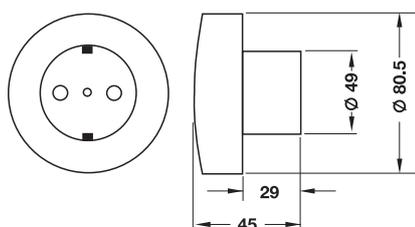

- > Area of application: For installation in extremely confined conditions
- > Material: Plastic
- > Finish/colour: Silver coloured
- > Drill hole Ø: 49–50 mm
- > Installation depth: 29 mm

Supplied with

Switch:

1 x mains lead 2 m with SV16 plug,

1 x connection lead 2 m with SV16 socket

Socket:

1 x mains lead 2 m with SV16 plug





IP20

	Cat. No.
Switch element	829.51.900
Socket element	829.51.910


Packing: 1 piece

Socket element

With SV16 plug system

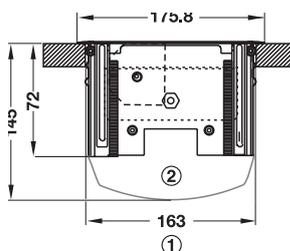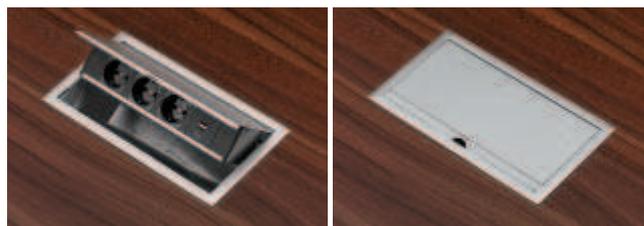

- ① Milling width
- ② Pocket for excess cable

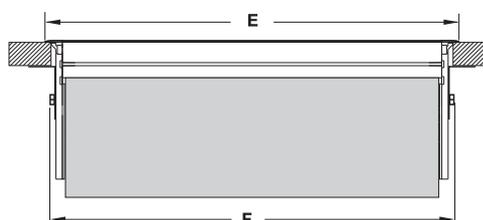

- > Plugs can stay plugged in, even in the closed position
- > Also available with USB charging station



- > Area of application: Kitchens or offices
- > Version: With pocket for excess cable, with 3 or 4 Schuko safety sockets
- > Material: Cover and frame: Aluminium, end caps: Plastic, power outlet box: Plastic
- > Finish/colour: Cover and frame: Anodized, end caps: Silver coloured, power outlet box: Black
- > Installation: For recess mounting

Supplied with

1 Socket element and

0.4 m mains lead with SV16 plug connector



IP20

Quantity	Dim. F mm	Dim. E mm	Cat. No.
3 Sockets	252	263	826.66.003
4 Sockets	305	316	826.66.004
3 sockets + 1 USB charging station 5V/2.1A	305	316	826.66.030

Packing: 1 piece

Order reference


Please order SV16 mains and interconnecting leads separately.

SV16 mains and interconnecting leads

► MB 2.170

DGH-M 2017, HDE-en, 10/16; Dimensional data not binding. We reserve the right to alter specifications without notice.

Socket element, lowerable

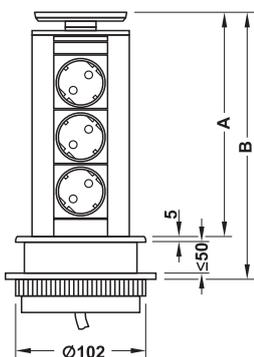

- > Rocker cover allows cable exit also in lowered position of the socket
- > Also available with USB charging station

- > Area of application: Offices, conference tables, kitchens, for concealing the sockets in the table top or wall unit
- > Version: With rocker cover
- > Material: Housing: Aluminium
- > Drill hole \varnothing : 102 mm
- > For panel thickness: 10–50 mm
- > Installation: In worktops up to 50 mm thick, drill hole and clamp fixing at rear

Supplied with

- 1 Socket element,
- 3 m mains lead with Schuko safety plug




IP20

Dim. A mm	Dim. B mm	Version	Cat. No.
211	287	3 Schuko safety sockets, rocker cover: Plastic silver coloured	822.74.950
		3 Schuko safety sockets, rocker cover: Solid stainless steel	822.74.960
246	322	3 Schuko safety sockets and 2 RJ-45 sockets, rocker cover: Plastic silver coloured	822.74.955
246	322	2 Schuko safety sockets and 1 USB charging station 5 W, rocker cover: Plastic silver coloured	820.52.793

Packing: 1 piece

Lift Socket element

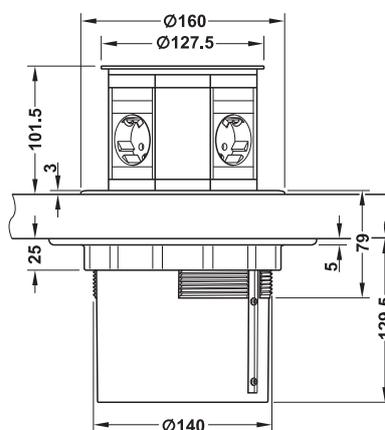

- > Can be accessed from 4 sides
- > Automatic lift mechanism activated by slight pressure impulse

- > Area of application: For concealing in the table top
- > Material: Plastic
- > Finish/colour: Black
- > Drill hole \varnothing : 140 mm
- > For panel thickness: 10–35 mm
- > Installation: Drill hole and clamp fixing at rear

Supplied with

- 1 Socket element,
- 2 m mains lead with Schuko safety plug



IP20

	Cat. No.
4 Schuko safety sockets	822.74.330
3 Schuko safety sockets, 2 RJ-45 sockets, Cat. 6	822.74.331

Packing: 1 piece



Switches/Sockets 230 V



Push Socket element

Socket element, rotating



2

Switches/Sockets 230 V

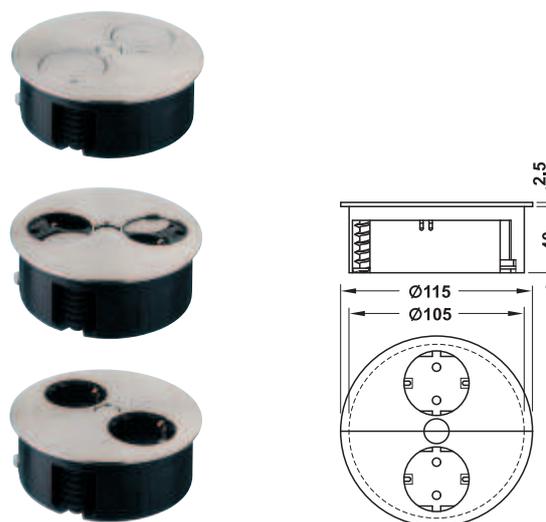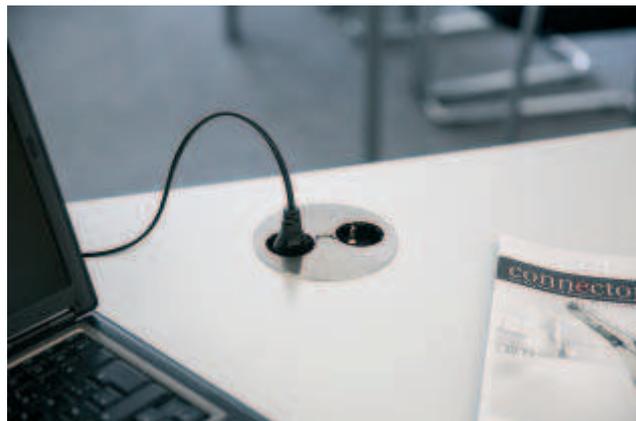


- > Compact, lowerable built-in system activated by slight pressure impulse



- > Area of application: Kitchens and offices
- > Material: Body: Plastic
- > Finish/colour: Aluminium, brushed nickel plated
- > Installation depth: 135 mm, less panel thickness
- > For panel thickness: 16–60 mm
- > Installation: Through-hole, with rear mounted lock ring
- > Drill hole Ø: 80 mm

Supplied with

- 1 Socket element,
- 2 m mains lead with separately supplied Schuko safety plug



IP20

Version	Cat. No.
1 Schuko safety socket, 2 Euro sockets	822.92.920
1 Schuko safety socket, 2 USB charging stations 5 V/2 A	822.92.922

Packing: 1 piece

- > Rotating, flat socket unit
- > 2 Schuko safety sockets
- > Very low installation depth



- > Area of application: Kitchens, offices, lounges, for panel thicknesses from 40 mm
- > Material: Body: Plastic, lid: Zinc alloy
- > Drill hole Ø: 105 mm
- > Installation depth: 40 mm
- > Installation: Drill hole and clamp fixing at rear

Supplied with

- 1 Socket element,
- 2 m mains lead with Schuko safety plug



IP20

Colour	Cat. No.
Stainless steel coloured	820.08.010

Packing: 1 piece

One-Plug Socket element



- > Replaceable, coloured decorative rings in black, white and stainless steel coloured

- > Area of application: Kitchens and offices
- > Material: Body: Plastic
- > Finish/colour: Black
- > Installation: Through hole, fixed in place with two pre-mounted cylindrical head screws 56 mm
- > Drill hole Ø: 56 mm

Supplied with


- 1 Socket element, 2 m mains lead with separately supplied Schuko safety plug
- 3 Decorative rings (black, white, stainless steel coloured)



Version	Cat. No.
1 Schuko safety socket with 3 decorative rings	820.08.351

Packing: 1 piece

Move Socket element

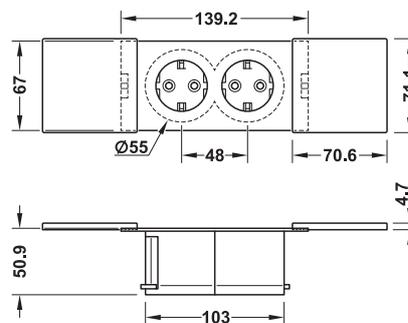


- > Space saving, even in open position
- > Integrated drainage

- > Area of application: Kitchens and offices
- > Version: 2-gang socket with two covers for sliding on
- > Material: Plastic
- > Finish/colour: Socket: Black
lid: Stainless steel coloured
- > Installation: Through hole, fixed in place with two pre-mounted cylindrical head screws at a distance of 48 mm
- > Drill hole Ø: 56 mm

Supplied with

- 1 Socket element, 2 m mains lead with separately supplied Schuko safety plug



Version	Cat. No.
2 Schuko safety sockets	822.92.030

DGH-M 2017, HDE-en, 10/16; Dimensional data not binding. We reserve the right to alter specifications without notice.

Modular Socket element

Individual components



- > Compact dimensions
- > Versatile
- > High-quality appearance





- > Area of application: Kitchens, offices and conference rooms
- > Installation depth: approx. 70 mm with leads

2

Switches/Sockets 230 V

→ **Mounting frame**

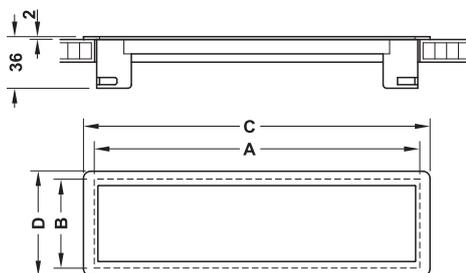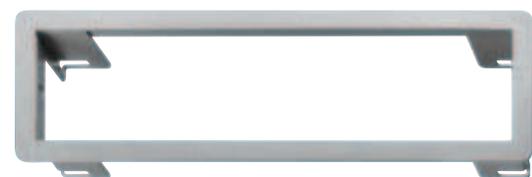

Note

Dim. A and B are cut-out dimensions for table

- > Material: Steel
- > Finish/colour: Silver grey, RAL 9006
- > For panel thickness: From 10 mm
- > Installation: For screw fixing

Supplied with

1 Built-in frame


Version	Dim. A mm	Dim. B mm	Dim. C mm	Dim. D mm	Cat. No.
3-gang	225	60	241	73	822.91.100
4-gang	267.5	60	283.5	73	822.91.101

Packing: 1 piece

Order reference

Please order socket unit separately.

→ **Mounting frame with designer cover**

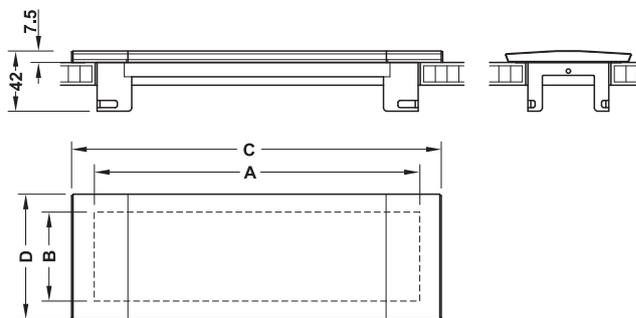

Note

Dim. A and B are cut-out dimensions for table

- > Material: Built-in frame: Steel, cover: Aluminium
- > Finish/colour: Cover: Anodized
- > For panel thickness: From 10 mm
- > Installation: For screw fixing and glue fixing

Supplied with

1 Built-in frame with cover

Version	Dim. A mm	Dim. B mm	Dim. C mm	Dim. D mm	Cat. No.
3-gang	225	60	257	87	822.91.102
4-gang	267.5	60	299.5	87	822.91.103

Packing: 1 piece

Order reference

Please order socket unit separately.

Socket unit

► MB 2.165

DGH-M 2017, HDE-en, 10/16; Dimensional data not binding. We reserve the right to alter specifications without notice.

→ Socket unit

For mounting frame



> Material: Plastic

Supplied with

- 1 Socket unit, for clipping in,
- 2 m mains lead with Schuko safety plug



Area of application	Version	Cat. No.
3-gang frame	3 Schuko safety sockets	833.91.120
	2 Schuko safety sockets 2 RJ-45 modules, Cat. 5	833.91.121
	2 Schuko safety sockets 1 USB charger module 5 V / 2 A	833.91.123
4-gang frame	2 Schuko safety sockets 2 free slots for media base plates and media modules	833.91.122

Packing: 1 piece

Order reference

Please order built-in frame separately.
Please order media base plate and media module separately.

→ Media base plate



> Finish/colour: Black

Version	Cat. No.
2-gang	822.93.300
1-gang	822.93.013

Packing: 1 piece

→ Media module



USB module



HDMI module



RJ-45 module, Cat. 5

Version	Cat. No.
USB module, for data transfer, no charging function	822.93.012
HDMI module	822.93.005
RJ-45 module, Cat. 5	822.93.011

Packing: 1 piece

Built-in frame

► MB 2.164

Modular Socket element

Complete sets with frame and socket unit

→ Modular Socket element, with mounting frame



Supplied with

- 1 Mounting frame
- 1 Socket unit for clipping in
- 2 m mains lead with separate Schuko safety plug

Version	Cat. No.
3 Schuko safety sockets	833.91.130
2 Schuko safety sockets, RJ-45 Cat. module 5	833.91.131
2 Schuko safety sockets, 1 USB charging module 5 V/2 A	833.91.132

Packing: 1 piece

→ Modular Socket element, with designer cover



Supplied with

- 1 Mounting frame with designer cover
- 1 Socket unit for clipping in
- 2 m mains lead with separate Schuko safety plug

Version	Cat. No.
3 Schuko safety sockets	833.91.133
2 Schuko safety sockets, 2 RJ-45 modules Cat.5	833.91.134
2 Schuko safety sockets, 1 USB charger module 5 V/2 A	833.91.135

Packing: 1 piece




Slide Socket element



2

Switches/Sockets 230 V

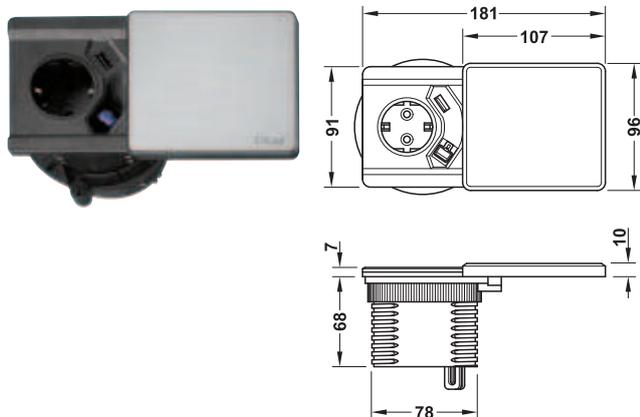

> Also available with inductive Qi charging, simply by placing the mobile phone on the element (without having to plug it in)

- > Area of application: Kitchens, offices, laboratories
- > Material: Plastic
- > Finish/colour: Top cover stainless steel coloured
- > Installation depth: 135 mm, less panel thickness
- > For panel thickness: 10–50 mm
- > Installation: Through hole, with rear mounted lock ring
- > Drill hole Ø: 80 mm

Note

Qi charging function for Qi enabled mobile phones with WPC standard 1.1

Supplied with

- 1 socket element,
- 3 m mains lead with Schuko safety plug




IP20

Version	Cat. No.
1 Schuko safety socket 1 USB charging station 3 m Cat. 6 network cable with RJ-45 plug, to pull out	820.52.790
1 Qi charging station in top cover 1 Schuko safety socket 1 USB charging station 3 m Cat. 6 network cable with RJ-45 plug, to pull out	Qi 820.52.791

Packing: 1 piece

DGH-M 2017, HDE-en, 10/16; Dimensional data not binding. We reserve the right to alter specifications without notice.

Power Eck Socket element

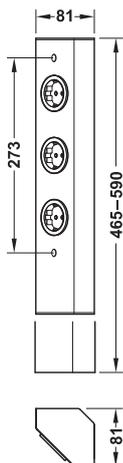

- > Ideal for retrofitting
- > Stainless steel



- > Area of application: Recesses between two levels in kitchens, utility rooms, laboratories
- > Version: 3 Schuko safety sockets
- > Material: Stainless steel
- > Finish/colour: Brushed
- > Length: 464–590 mm
- > Installation: For screw fixing; height can be adjusted via telescopic panel

Supplied with

- 1 Socket element with telescopic panel,
- 2 m mains lead with Schuko safety plug




IP20

Version	Cat. No.
3 Schuko safety sockets	822.10.000

Packing: 1 piece

Sockets for kitchen islands

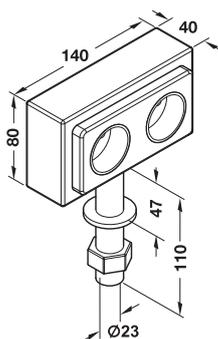

- > Material: Housing: Stainless steel, sockets: Plastic
- > Finish/colour: Sockets: Black, housing: Satin
- > Version: Tube ends welded and ground

Supplied with

- 2-gang socket 230/240 V, max. 16 A, 1.5 m mains lead,
- M22 hexagonal nut, washer, fixing material and 1 set of installation instructions




Installation Ø mm	Cat. No.
23	828.12.002

Packing: 1 piece

Combination socket element

With USB charging station and Bluetooth® speaker

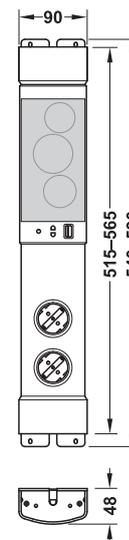

- > Wireless music player and charging station for mobile devices



- > Area of application: Kitchens, utility rooms
- > Version: 2 Schuko safety sockets, Bluetooth® speaker 4.5 W and USB charging station 5 V/ 2 A
- > Finish/colour: Stainless steel coloured
- > Dim. (W x D x H): 88 x 48 x 540–590 mm
- > Installation: For screw fixing, height can be adjusted via integrated panels (0–50 mm)

Supplied with

- 1 Socket element with panels,
- 1.2 m mains lead with Schuko safety plug



IP20



	Cat. No.
Combination socket element	822.10.080

Packing: 1 piece