


Spring hinge




- > Opening angle: 90°
- > Material: Steel
- > Finish: Galvanized
- > For door thickness: From 16 mm
- > Side panel thickness: 16–22 mm
- > Installation: For screw fixing
- > Adjustment facility: Side and depth adjustment via slots
- > With or without automatic closing spring (optional)



Installation




Full overlay mounting



Inset mounting


- ① 1 spacer plate
- ② Hinge turned

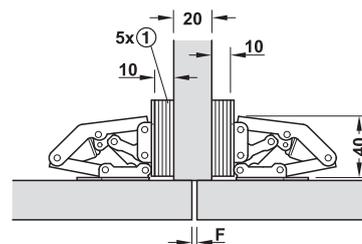

Half overlay mounting/twin mounting

- ① 5 spacer plates each side

Installation dimensions



Full overlay mounting

Side panel thickness mm	Door overlay mm	Gap F mm	Number of spacer plates pieces
16	14	2	3
17	16	1	2
18	16	2	2
19	16	3	2
20	20	–	–
21	20	1	–
22	20	2	–

Note

From a side panel thickness of <20 mm a spacer plate is inserted beneath the hinge screw-on plate.

Larger corner distances and gaps can be achieved using spacer plates (also stackable).

	Cat. No.
With automatic closing spring	343.33.970
Without automatic closing spring	343.34.960

Packing: 1 or 100 pieces

Order reference

Please order spacer plate separately.

→ Spacer plate



- > Material: Plastic
- > Colour: White
- > Stackable

Thickness mm	Cat. No.
2	343.34.780

Packing: 1 or 20 pieces