


Silent-VF 80

For door weights up to 80 kg




Easy height adjustment using adjusting screw


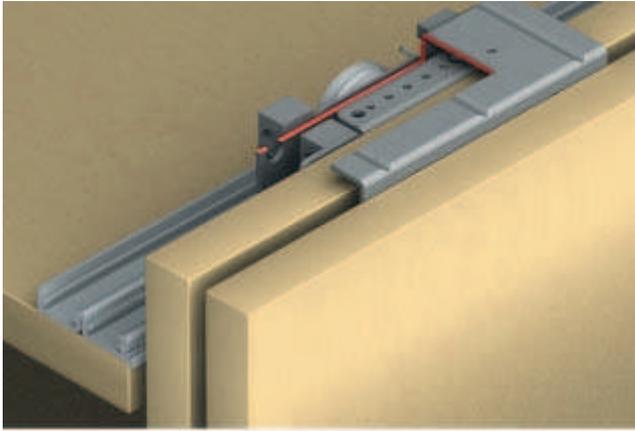


- Door thickness: 19 – 28 mm
- Height adjustment: ± 1.5 mm
- Material: Running gears and guides: Steel
- Running gear: Top running, 1 roller, with ball bearing mounted, plastic coated roller
- Door stopper: Top and bottom stopper, with top retainer
- Installation: Running gear and guide for screw fixing


Height adjustment

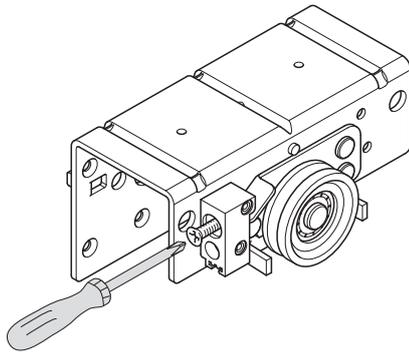


Installation dimensions

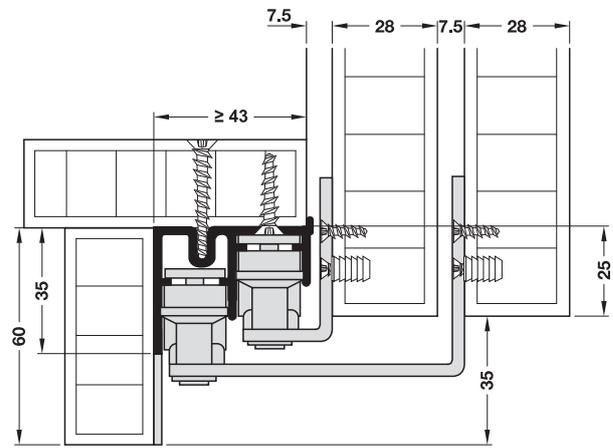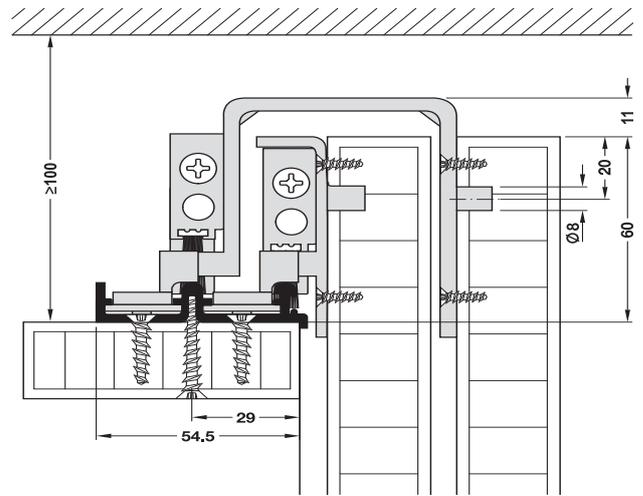

**Drilling pattern
 Top running gear**

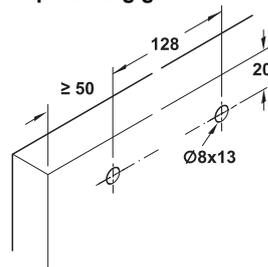

Bottom running gear

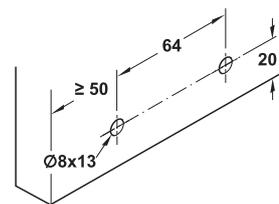

→ Set





	Cat. No.
For 2 doors	406.80.002
For 3 doors	406.80.003

Packing: 1 set



Order reference

- Please order running and guide tracks separately.
- For cabinets with more than 3 doors, please order the following sets:
For cabinets with 4 doors: 2 Sets for 2 doors
For cabinets with 5 doors: 1 Set for 2 doors and 1 set for 3 doors

→ Set components

		For 2 doors	For 3 doors	Material	Finish/colour
Running gear, for front door		2 pieces	2 pieces	Steel	Plastic coated grey
Running gear, for rear door		2 pieces	4 pieces	Steel	Plastic coated grey
Door stopper, top, for front and rear door		1 pair	2 pairs	Plastic	Grey
Guide, for front door		2 pieces	2 pieces	Steel	Plastic coated grey
Guide, for rear door		2 pieces	4 pieces	Steel	Plastic coated grey
Door stopper, bottom		2 pieces	3 pieces	Plastic	Grey
Fixing material		1 piece	1 piece	–	–

→ Tracks and individual components

		Top panel thickness mm	Material	Finish/colour	Length m	Cat. No.
Double top running track, for screw fixing		min. 19	Aluminium	Silver coloured anodized	2.5	406.82.902
					3.5	406.82.903
Double bottom guide track, for screw fixing		–	Aluminium	Bright	2.5	407.47.002
					3.5	407.47.003

Packing: 1 piece

Planofit straightening fitting

► FF 9.82