


Häfele Slido Classic 40 IF C



- > Door width: ≥ 370 mm with soft closing mechanism on one side,
 ≥ 550 mm with soft closing mechanism on both sides
- > Door thickness: 16–19 mm
- > Door stopper: Top clip-in door stopper or soft and self closing mechanism, for sliding into running track
- > Material: Housing and running gear: Zinc alloy, guide: Plastic
- > Running gear: Top running, 4 rollers
- > Running gear guided by: Ball bearing mounted roller: Plastic, axle: Steel
- > Adjustment facility: Height ± 2 mm on running gear using adjusting wheel
- > Installation: Housing for screw fixing, running gear without tools (quick fixing system), guide for press fitting into drill hole

Installation dimensions

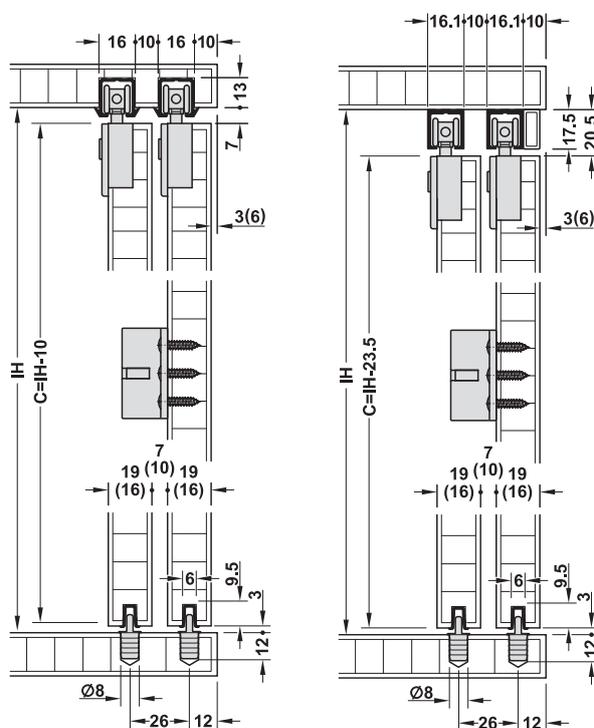


For groove mounting

For screw fixing


IH = inner cabinet height
C = door height

Drilling pattern

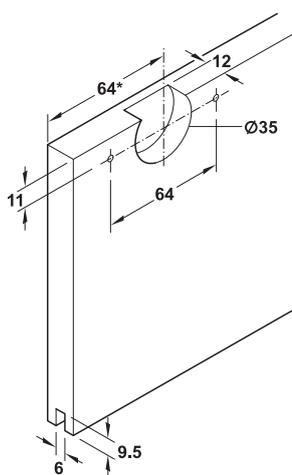


* = when using inspection support + 43 mm

Door overlap



Cabinet with 2 doors



Cabinet with 3 doors

Running track versions



Single running track for press fitting



Double running track for press fitting



Single running track for screw fixing



Double running track for screw fixing

→ Set

	Version	Supplied with	Cat. No.
For 1 door	With clip-in door stopper	2 running gears 2 door stoppers with clip-in door stopper 1 inspection support 1 guide 1 mounting aid	402.33.024
	With soft and self closing mechanism on both sides, 40 kg	2 running gears with soft and self closing mechanism 2 door stoppers for soft and self closing mechanism 1 guide 1 mounting aid	402.33.025
For 2 doors	With clip-in door stopper	4 running gears 4 door stoppers with clip-in door stopper 1 follower 2 inspection supports 2 guides 1 mounting aid	402.33.026
	With soft and self closing mechanism on one side, 40 kg	4 running gears (2 with soft and self closing mechanism) 4 door stoppers (2 with clip-in door stopper, 2 for soft and self closing mechanism) 1 follower 2 guides 1 mounting aid	402.33.027
	With soft and self closing mechanism on both sides, 40 kg	4 running gears with soft and self closing mechanism 4 door stoppers for soft and self closing mechanism 1 follower 2 guides 1 mounting aid	402.33.028

Packing: 1 set

Order reference

Please order running and guide tracks separately.

For cabinets with 3 doors, please order the following sets: 1 set for 1 door and 1 set for 2 doors.

Note

Pitch length of running gears must be min. 245 mm with soft closing mechanism on one side and min. 425 mm with soft closing mechanism on both sides.

Inspection support cannot be used in combination with running gear with soft and self closing mechanism.

→ Tracks and accessories

		Cabinet top panel thickness mm	Material	Finish/colour	Length m	Cat. No.
Single top running track, for press fitting and glue fixing into groove 16 mm or for screw fixing with countersunk head screws 3 mm		Glue fixing: Min. 19; screw fixing: Min. 30	Aluminium	Bright, visible areas grooved	2.5	402.33.642
					3.5	402.33.643
Double top running track, for press fitting and glue fixing into groove 16 mm or for screw fixing with countersunk head screws 3.5 mm		Glue fixing: Min. 19; screw fixing: Min. 30	Aluminium	Bright, visible areas grooved	2.5	402.33.652
					3.5	402.33.653
Single top running track, for screw fixing with countersunk head screws 3.5 mm		-	Aluminium	Silver coloured anodized	2.5	402.30.642
					3.5	402.30.643
Double top running track, for screw fixing with countersunk head screws 3.5 mm, for door thickness 19 mm		-	Aluminium	Silver coloured anodized	2.5	402.30.652
					3.5	402.30.653
Single bottom guide track, with harpoon rib, for press fitting and glue fixing into groove 6 mm		-	Plastic	Grey	2.5	402.30.802
					3.5	402.30.803
Panel profile for glue fixing with adhesive strips		-	Aluminium	Silver coloured anodized	2.5	402.33.412
					3.5	402.33.413

Packing: 1 piece

Straightening fittings

► FF 9.122