INDAUX
FURNITURE FITTINGS MANUFACTURER

INDA-matic
gradual closing

JUNIOR-6
Furniture fittings for
supported sliding doors

JUNIOR-6 INDAMATIC

INDAmatic
gradual closing

Improved, even smoother runners, thanks to their lower bearings and their triple running points which prevent unwanted door movement. But above all it is known for its automatic and cushioned gradual soft closing.

Double upper track.

4.2m bars	INDAMATIC	
Silver-anodized	715.542.100	
Matt silver-anodized	715.542.516	
Brass-anodized	715.542.785	10
Black-anodized	715.542.892	
Golden-anodized	715.542.774	
White-lacquered Ral 9010	715.542.800	
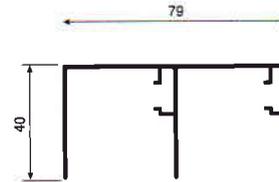
Lower track.

| 4.2m bars	Single*	Double	
Silver-anodized	714.342.101	714.242.104	
Matt silver-anodized	714.342.510	714.242.513	10
Brass-anodized	714.342.786	714.242.782	or
Black-anodized	714.342.893	714.242.896	20*
Golden-anodized	714.342.775	714.242.771	
White-lacquered	714.342.801	714.242.804	
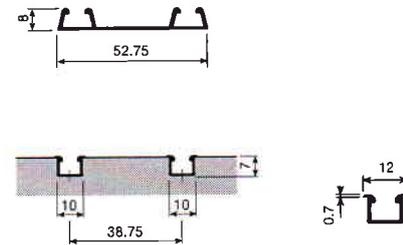
Bag of components.

50 kp. load	2 door	3 door	
	704.402.101	704.403.103	5

Each bag contains.

		2 door	3 door
A	Cushioned automatic gradual closing INDAMATIC	4 units	4 units
B	r/h top roller	2 units	3 units
C	l/h top roller	2 units	3 units
D	bottom roller	4 units	6 units
E	door positioner		1 unit

INDAmatic
gradual closing

JUNIOR-6 INDAMATIC

Assembly

INDAmatic
gradual closing

INDAUX   > **CH.8** FITTINGS FOR SLIDING DOORS

JUNIOR-6 supported sliding doors
JUNIOR 6 SLIDING DOORS SYSTEM
JUNIOR-6 for inclined ceilings
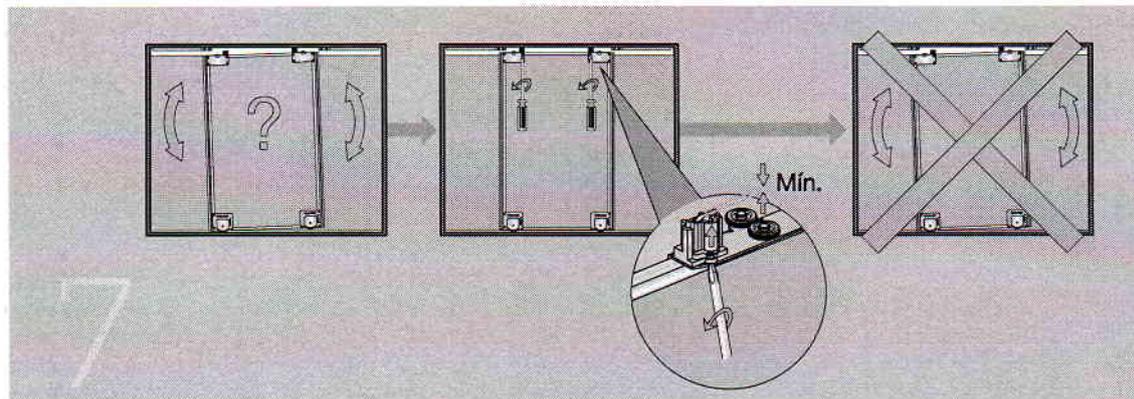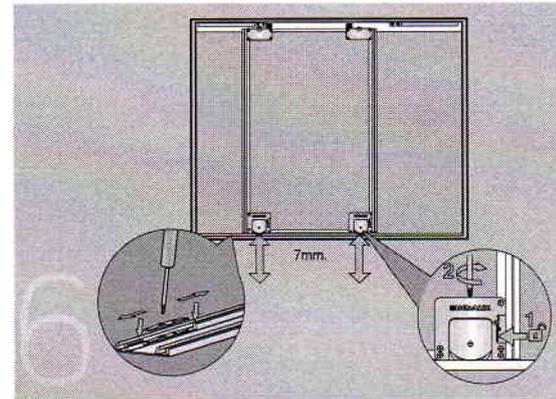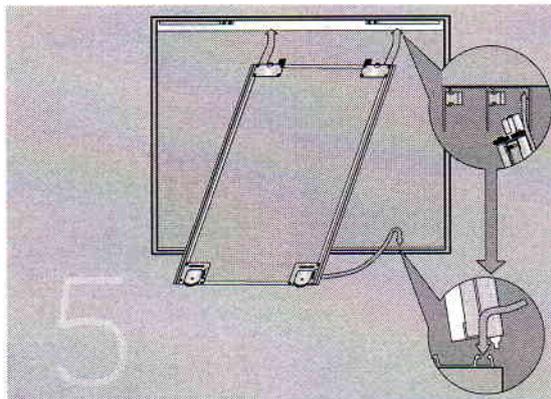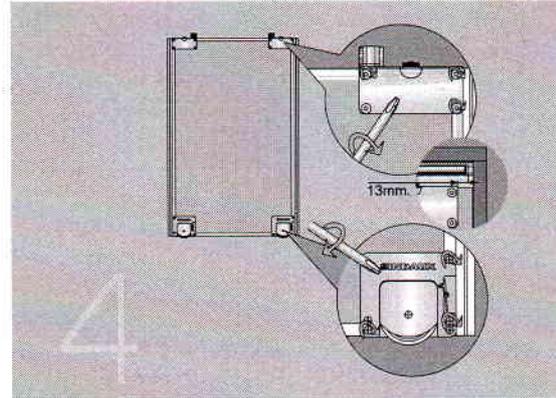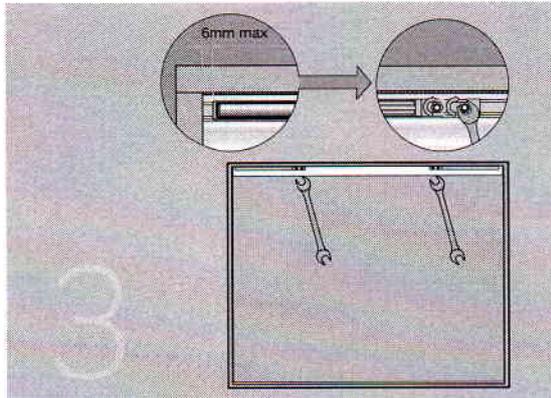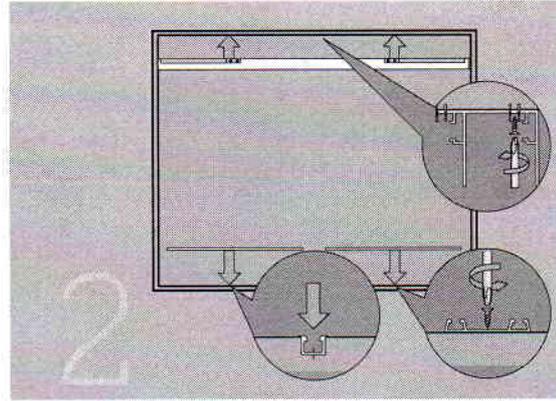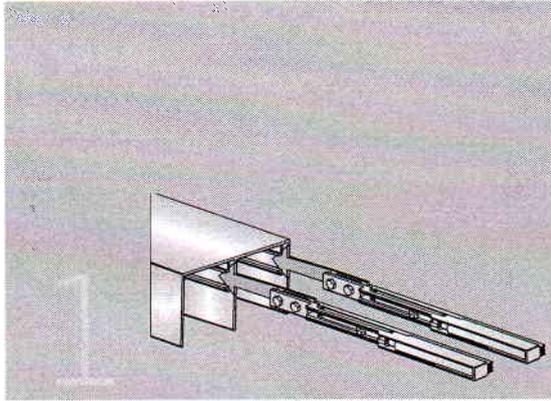
JUNIOR-6 for inclined ceilings

For use in sliding doors on inclined ceilings, the upper runners
are substituted by intermediate runners mounted on the
lateral profiles of the door.

Intermediate profile

1.45 m bar	717.215.516	1

Intermediate profile clamp

Grey Ral-7040	723.100.313	50

Interior door components

Zinc-plated	710.800.101	1

2x   2x   4x

Exterior door components

Zinc-plated	710.810.100	1

2x   2x   4x

The rollers will roll along intermediate
profiles mounted on the shelves. The
full length doors maintain the normal
rollers on the upper track.
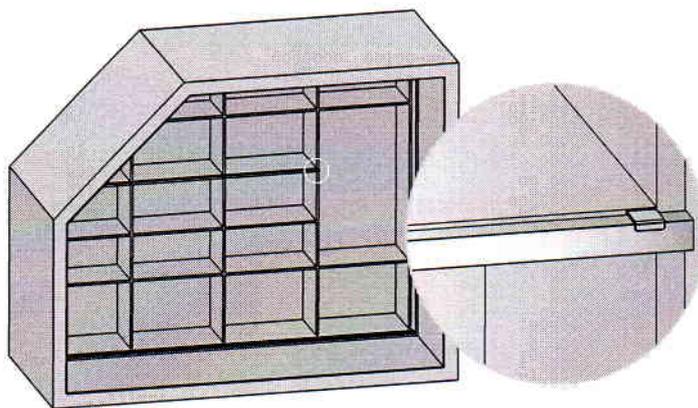
The shelf door distance is adjustable
to 28mm.

75±14

114±14

70,5±14   7   38,75   33,2   26,2

INDAUX

> CH.8 FITTINGS FOR SLIDING DOORS

JUNIOR-6 supported sliding doors
JUNIOR 6 SLIDING DOORS SYSTEM
JUNIOR-6 for inclined ceilings
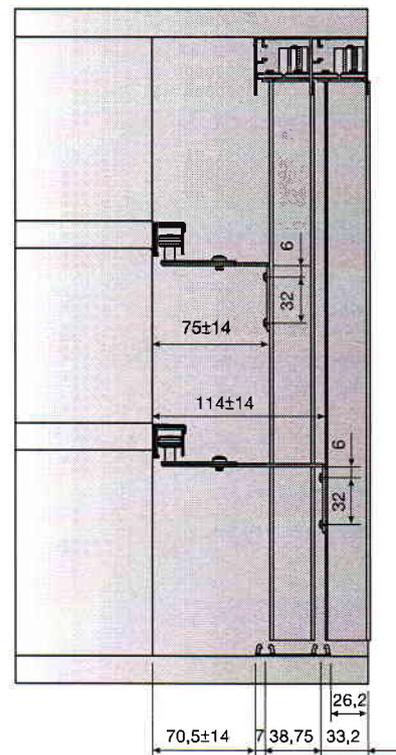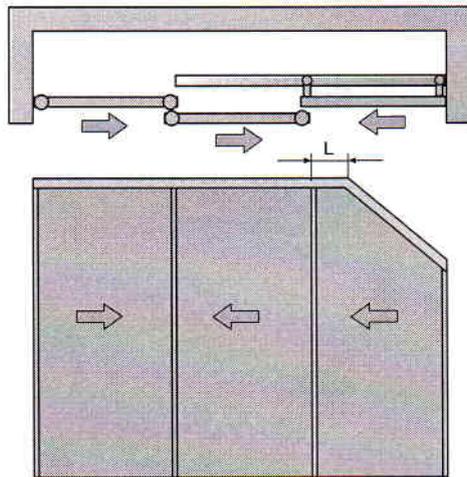
JUNIOR-6 for inclined ceilings

3 door cupboard,
and 1 is inclined.

4 door cupboard,
and 2 are inclined.
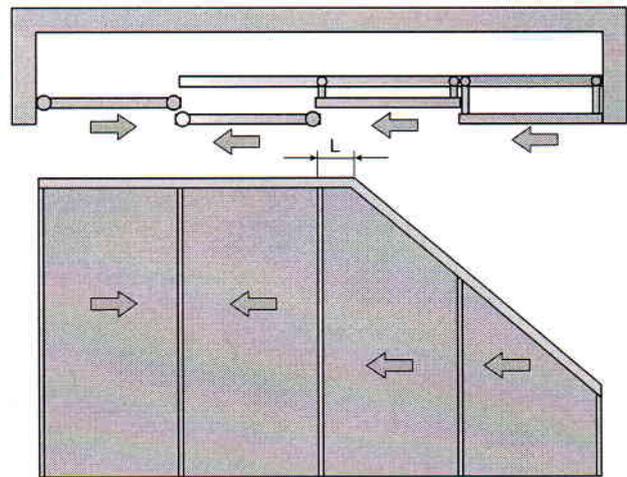
Doors with a partially inclined cut:

• If L > 260mm, the two upper rollers can be put on the cut door.
• If L < 260mm, two intermediate rollers will have to be used.

In the case where more than one door uses intermediate rollers, both doors can use the same intermediate rail, or each can use tracks at different heights, depending on the ceiling's angle of inclination and the width of the doors.

Overhang aligned with the groove of the profile and fixed with 2 screws.
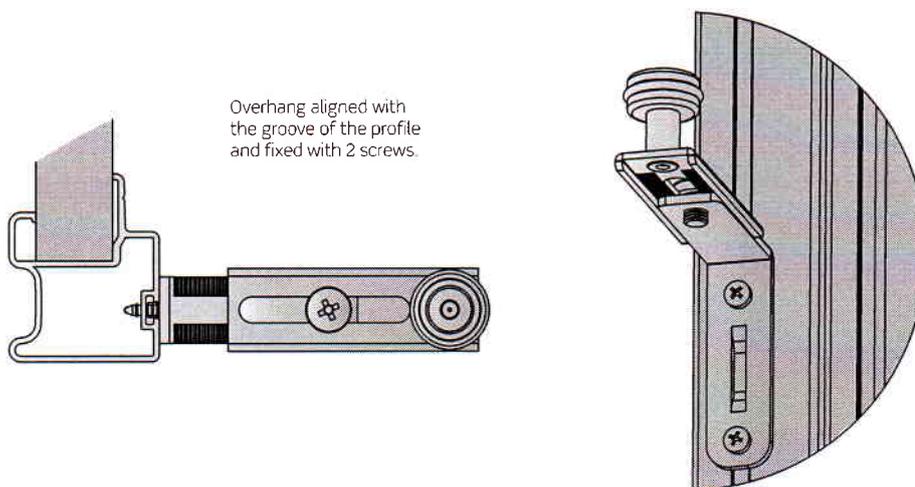
2 JUNIOR-6 door range

■ 16mm door

16mm thick wooden door with aluminium handle.

16mm handle profile.

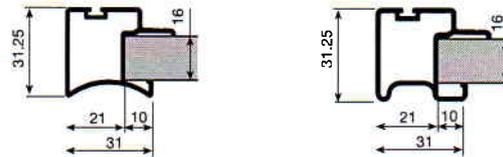|	2,6m. bars	5,2m. bars	INDAMATIC 2,6m. bars	5,2m. bars	
Silver-anodized		714.652.105		715.452.102	
Matt silver-anodized		714.652.514		715.452.511	
Brass-anodized		714.652.783		715.452.780	
Black-anodized		714.652.890		715.452.894	
Golden-anodized		714.652.772		715.452.776	
White-lacquered		714.652.805		715.452.802	
Beech coated, not varnished	714.626.861		715.426.865		
Beech coated, melamine	714.626.415		715.426.412		
Pine valsain coated, not varnished	714.626.872		715.426.876		
Pine valsain coated, melamine	714.626.441		715.426.445		10
Oak coated, not varnished	714.626.905		715.426.902		
Oak coated, melamine	714.626.721		715.426.725		
Sapeli coated, not varnished	714.626.931		715.426.935		
Sapeli coated, melamine	714.626.732		715.426.736		
Coated, not varnished cherry	714.626.942		715.426.946		
Cherry coated, melamine	714.626.883		715.426.880		

Dust strip.

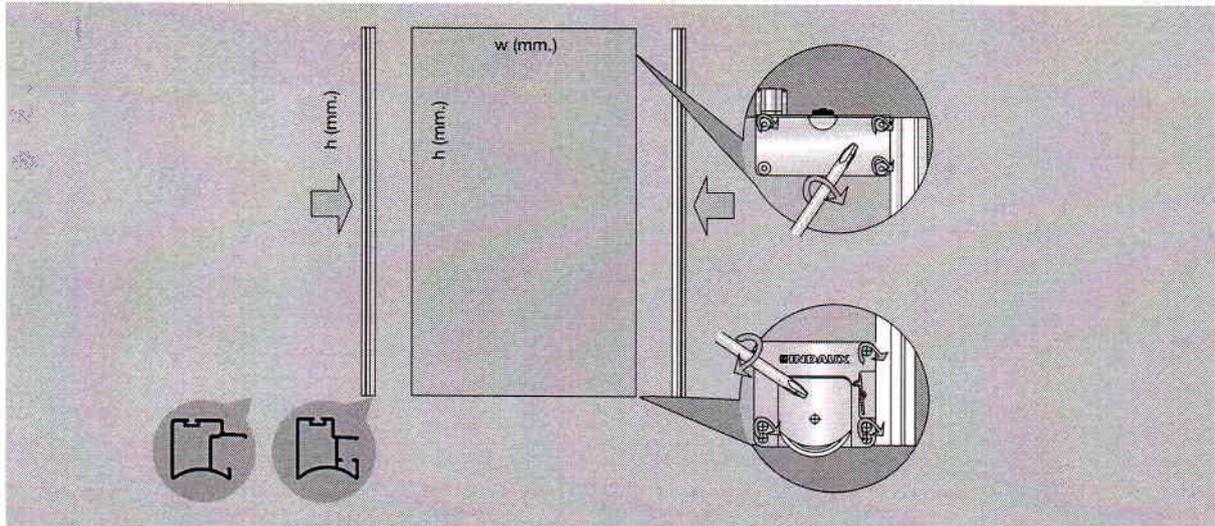| Size	Roll	Grey	
5,5mm x 10mm	250m.	753.110.105	1

The dust strip should be cut according to the door's length. A standard 250M roll length is supplied.

Assembly

INDAUX

> **CH.8** FITTINGS FOR SLIDING DOORS

16mm door

Technical data

classic

*INDA*matic
gradual closing