


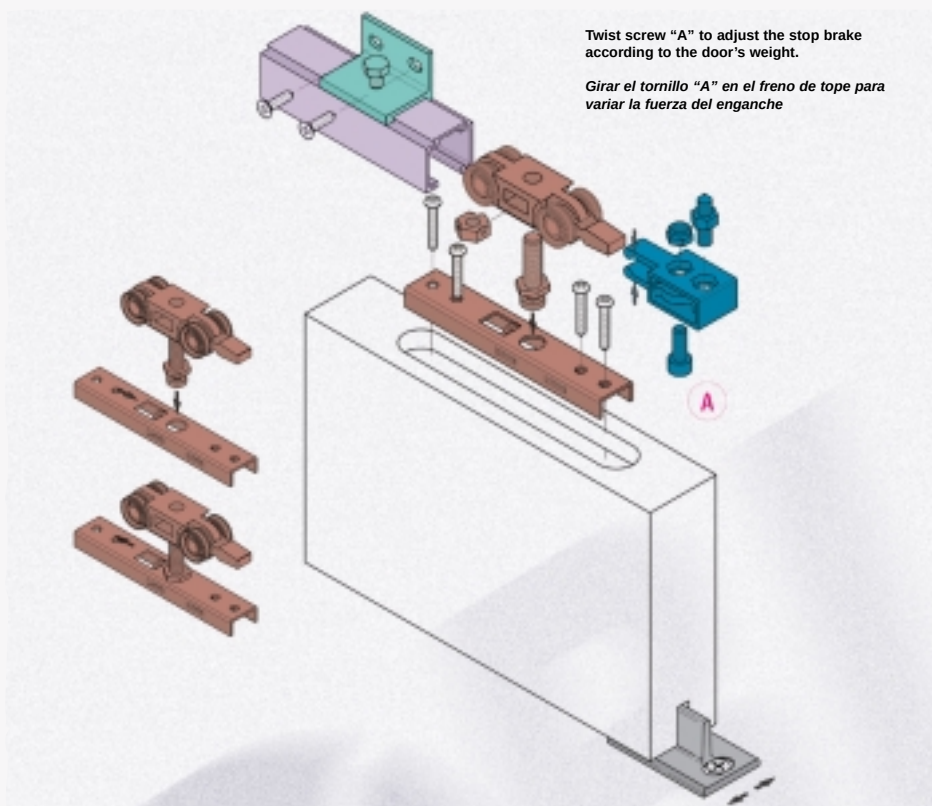

CHARACTERISTICS

- **FUNCTION** It allows the sliding of a rigid flush door with the track and min. gap.
- **CAPACITY** 40 kg.
- **USE** For rigid doors.
- **SLIDING MECHANISM** Uses nylon rollers with Teflon wheels on pins.
- **PRATICAL** Upper sliding movement, leaving the lower section free.
- **ADJUSTMENT** Features upper sliding movement, leaving the lower section free. The stop brake is adjustable according to the door's weight.

CARACTERISTICAS

- **FUNCIÓN** Permite deslizar una puerta rígida a ras de la guía superior.
- **CAPACIDAD** 40 kg.
- **USO** Para Puertas rígidas.
- **DESPLAZAMIENTO** Utiliza carros en nylon con ruedas en teflon con perno y cojinetes de bolas.
- **PRACTICIDAD** El sistema desliza por la parte superior dejando el suelo libre.
- **REGULACIÓN** El freno es regulable según el peso de la hoja.



KIT Art. 0450/3

Art. 0450/51



Rollers with integrated bracket Pcs. 2
Carro con soporte de aguantante tipo retractoril Pzas. 2

Art. 0810/80X800



Lower guide Pcs. 1
Guiador inferior Pz. 1

Art. 0400/52



Stop brake Pcs. 2
Freno de tope Pzas. 2

Art. 0400/1 m. 6 Art. 0400/6 m. 3





Drilled and anodised aluminium track,
capacity 40 kg.
Guía en aluminio perforado y anodizado 40 kg.

Art. 0400/5



Side mount
Soporte de conexión lateral

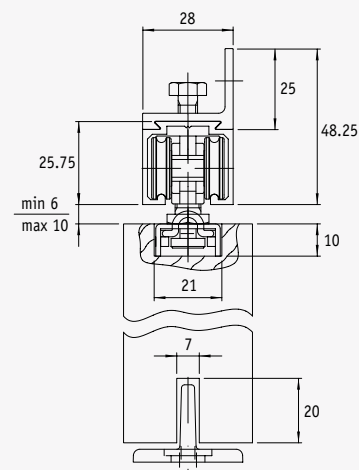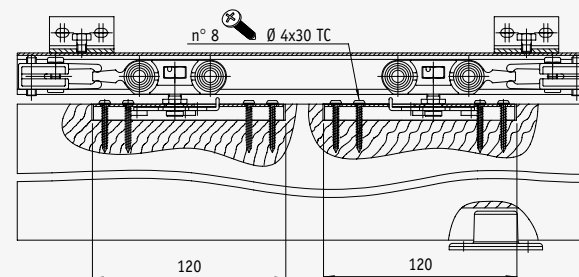

CAPACITY 40 kg.
CAPACIDAD 40 kg.