




0360

ZAPFENSCHNEIDER TENON PLUG CUTTER

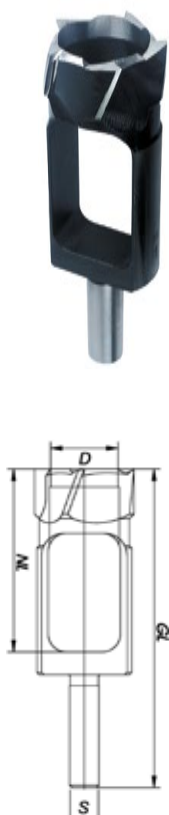

D	NL	GL	S	EAN	ART.-NR.
6	80	140	13	9002696094975	036000600
8	80	140	13	9002696011064	036000800
10	80	140	13	9002696011095	036001000
12	80	140	13	9002696011132	036001200
13	80	140	13	9002696011163	036001300
14	80	140	13	9002696011170	036001400
15	80	140	13	9002696011194	036001500
16	80	140	13	9002696011217	036001600
18	80	140	13	9002696011231	036001800
20	80	140	13	9002696011255	036002000
22	80	140	13	9002696011262	036002200
25	80	140	13	9002696011279	036002500
30	80	140	13	9002696011293	036003000
32	80	140	13	9002696095033	036003200
35	100	160	16	9002696011309	036003500
40	100	160	16	9002696011323	036004000
45	100	160	16	9002696011330	036004500
50	100	160	16	9002696011347	036005000
55	100	160	16	9002696011354	036005500
60	100	160	16	9002696011361	036006000
65	100	160	16	9002696011378	036006500
70	100	160	16	9002696011385	036007000
80	100	160	16	9002696048343	036008000

D	NL	GL	S	EAN	ART.-NR.
3/8"	3 3/16"	5 1/2"	1/2"	9002696011033	036000952
1/2"	3 3/16"	5 1/2"	1/2"	9002696011019	036001270
5/8"	3 3/16"	5 1/2"	1/2"	9002696011040	036001588
3/4"	3 3/16"	5 1/2"	1/2"	9002696011026	036001905
7/8"	3 3/16"	5 1/2"	1/2"	9002696011057	036002223
1"	3 3/16"	5 1/2"	1/2"	9002696011088	036002540
1 1/4"	3 3/16"	5 1/2"	1/2"	9002696011118	036003175
1 3/8"	3 5/16"	6 5/16"	1/2"	9002696011156	036003493
1 1/2"	3 5/16"	6 5/16"	1/2"	9002696011101	036003810
1 5/8"	3 5/16"	6 5/16"	1/2"	9002696011187	036004128
1 3/4"	3 5/16"	6 5/16"	1/2"	9002696011149	036004445
2"	3 5/16"	6 5/16"	1/2"	9002696011248	036005080

Ausführung: DIN 7489, mehrschneidig, mit Peripherieschneide und zylindrischem Schaft. Wir fertigen auch Speziallängen für Bohrproben. HS- und HW-Ausführung sowie Spezialschäfte wie MK und Innengewinde auf Anfrage. Bis Dm. 32 mm: Schaft 13x50mm. Ab Dm. 33mm: Schaft 16x50mm.

Verwendung: Zum Bohren von sehr langen Ausflückdübel. Die Zapfenschneider werden mit leichtem Übermaß gefertigt, damit die Ausflückdübel einwandfrei sitzen. In Verwendung mit Forstnerbohrer und Kunstbohrer.

Characteristics: DIN 7489, peripheral cutter, multi-cutting, cylindrical shank. Available in special steel. On request in HS and TCT, with special lengths for specimen and shanks like morse cone and inner thread. Up to 32mm: Shank 13x50mm. From 33mm: Schank 16x50mm.

Usage: For improving knot-holes, making tenons, or special length plugs. The tenon cutters have an excess of 0,1 mm to permit the exact seating of the knot-hole dowels.

DREHZAHLTABELLE / RPM TABLE

U/MIN RPM	WEICHHOLZ SOFT WOOD	HARTHOLZ HARD WOOD
< Ø 16 mm	1000	500
< Ø 40 mm	500	300
> Ø 40 mm	200	150