



# LP70M

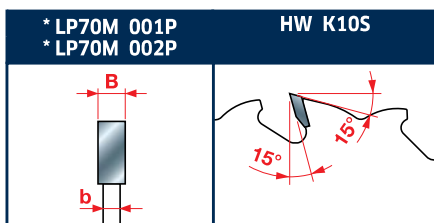

Tooth features - Caratteristiche del dente

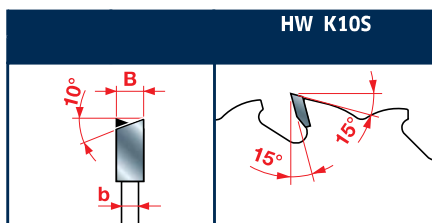

Tooth features - Caratteristiche del dente

| Ultimate<br>Eccellente | High<br>Ottimo | Good<br>Buono |
|------------------------|----------------|---------------|
|                        |                |               |

Ripping and crosscutting of soft and hardwood  
Legno tenero e duro lungo e trasverso vena

## HW - Saw blades for on-site jobs

### HW - Lame per l'edilizia

Saw blades suitable for ripping and crosscutting.

**Machines:** Table saws.

**Features:** ATB tooth with positive cutting angle.

**Material:** Soft and hard solid wood and panels, even in case of nails or metal clips.

Lame per taglio lungo e trasverso vena.

**Macchine:** Seghe da banco.


**Caratteristiche:** Dentatura alterna con angolo di taglio positivo.

**Materiale:** Legni teneri e duri massicci e pannelli, anche con presenza di chiodi o graffe metalliche.

| D<br>mm | B<br>mm | b<br>mm | d<br>mm | Z    | NL<br>FT | Code<br>Codice | SAP<br>SAP |
|---------|---------|---------|---------|------|----------|----------------|------------|
| 300     | 2,8     | 1,8     | 30      | 24 * | 2/10/60  | LP70M 001P     | F03FS03762 |
| 350     | 3,0     | 2,2     | 30      | 28 * | 2/10/60  | LP70M 002P     | F03FS03763 |

| D<br>mm | B<br>mm | b<br>mm | d<br>mm | Z  | NL<br>FT | Code<br>Codice | SAP<br>SAP |
|---------|---------|---------|---------|----|----------|----------------|------------|
| 300     | 2,6     | 1,8     | 25      | 24 |          | LP70M 004P     | F03FS03766 |
| 315     | 3,2     | 2,2     | 30      | 24 | 2/10/50  | LP70M 003P     | F03FS03765 |
| 315     | 3,2     | 2,2     | 25      | 48 |          | LP70M 006P     | F03FS03768 |
| 400     | 3,8     | 2,8     | 30      | 28 | 2/10/60  | LP70M 008P     | F03FS03770 |
| new 500 | 4,4     | 3,2     | 30      | 36 | 2/10/60  | LP70M 010P     | F03FS03772 |
| new 600 | 5,2     | 4,0     | 30      | 48 | 2/10/60  | LP70M 012P     | F03FS03774 |

# LP60M

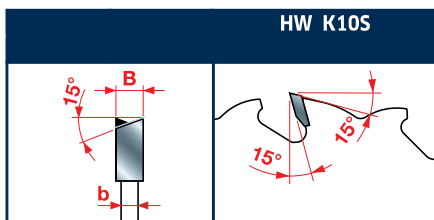

Tooth features - Caratteristiche del dente

## HW - Saw blades for hardwood and softwood

### HW - Lame circolari per legni teneri e duri

Saw blades suitable for ripping and crosscutting (see details).

**Machines:** Portable machines.

**Features:** ATB 15° tooth with positive cutting angle.

**Material:** Soft and hard solid wood.

Lame per taglio lungo e trasverso vena (vedi dettagli).

**Macchine:** Macchine portatili.

**Caratteristiche:** Dentatura alterna a 15° con angolo di taglio positivo.

**Materiale:** Legni teneri e duri.

#### For ripping


##### Per taglio lungo vena

| D<br>mm | B<br>mm | b<br>mm | d<br>mm | Z  | NL<br>FT | Code<br>Codice | SAP<br>SAP |
|---------|---------|---------|---------|----|----------|----------------|------------|
| 300     | 3,2     | 2,2     | 30      | 48 | 2/10/60  | LP60M 014P     | F03FS03744 |

| Ultimate<br>Eccellente | High<br>Ottimo | Good<br>Buono |
|------------------------|----------------|---------------|
|                        |                |               |

Ripping of soft and hardwood  
Legno tenero e duro lungo vena

# LP60M

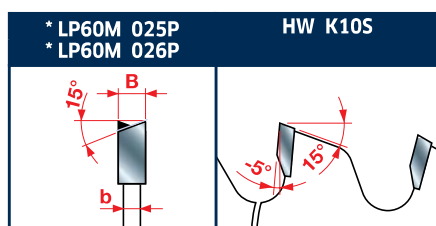

Tooth features - Caratteristiche del dente

## HW - Saw blades for hardwood and softwood

### HW - Lame circolari per legni teneri e duri

#### For ripping and cross cutting

##### Per taglio lungo e trasverso vena

| D<br>mm        | B<br>mm | b<br>mm | d<br>mm | Z   | NL<br>FT | Code<br>Codice | SAP<br>SAP |
|----------------|---------|---------|---------|-----|----------|----------------|------------|
| 260            | 2,6     | 1,8     | 30      | 60  | 2/10/60  | LP60M 013P     | F03FS03743 |
| 300            | 2,8     | 1,8     | 30      | 48  | 2/10/60  | LP60M 003P     | F03FS03733 |
| 300            | 3,2     | 2,2     | 30      | 60  | 2/10/60  | LP60M 015P     | F03FS03745 |
| <b>new</b> 305 | 2,8     | 1,8     | 30      | 48* |          | LP60M 025P     | F03FS06301 |
| 350            | 3,0     | 2,2     | 30      | 54  | 2/10/60  | LP60M 007P     | F03FS03737 |
| 350            | 3,5     | 2,5     | 30      | 72  | 2/10/60  | LP60M 020P     | F03FS03750 |

Ripping and crosscutting of soft and hardwood  
Legno tenero e duro lungo e trasverso vena

| Ultimate<br>Eccellente | High<br>Ottimo | Good<br>Buono |
|------------------------|----------------|---------------|
|------------------------|----------------|---------------|

#### For cross cutting


##### Per taglio trasverso vena

| D<br>mm        | B<br>mm | b<br>mm | d<br>mm | Z   | NL<br>FT | Code<br>Codice | SAP<br>SAP |
|----------------|---------|---------|---------|-----|----------|----------------|------------|
| 250            | 3,2     | 2,2     | 30      | 60  | 2/10/60  | LP60M 011P     | F03FS03741 |
| 250            | 2,8     | 1,8     | 30      | 80  | 2/10/60  | LP60M 001P     | F03FS03731 |
| 280            | 2,8     | 1,8     | 30      | 64  | 2/10/60  | LP60M 002P     | F03FS03732 |
| 300            | 2,8     | 1,8     | 30      | 72  | 2/10/60  | LP60M 004P     | F03FS03734 |
| 300            | 2,8     | 1,8     | 30      | 96  | 2/10/60  | LP60M 005P     | F03FS03735 |
| <b>new</b> 305 | 2,8     | 1,8     | 30      | 72* |          | LP60M 026P     | F03FS06302 |
| 305            | 2,8     | 1,8     | 30      | 96  | 2/10/60  | LP60M 006P     | F03FS03736 |
| 350            | 3,0     | 2,2     | 30      | 108 | 2/10/60  | LP60M 008P     | F03FS03738 |

Crosscutting of soft and hardwood  
Legno tenero trasverso vena

| Ultimate<br>Eccellente | High<br>Ottimo | Good<br>Buono |
|------------------------|----------------|---------------|
|------------------------|----------------|---------------|

# LP67M **new**

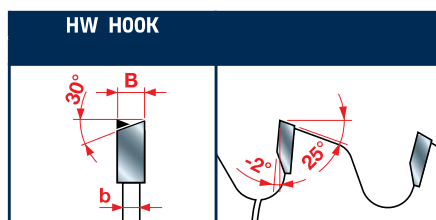

Tooth features - Caratteristiche del dente

## HW - Saw blades to cut bilaminated panels

### HW - Lame per il taglio di pannelli bilaminati

To cut bilaminated panels.

**Machines:** Benchtop and portable machines.

**Features:** ATB 30° with negative cutting angle.

**Material:** Bilaminated panels, chipboard or MDF.

Per il taglio di pannelli bilaminati.

**Macchine:** Seghe da banco e macchine portatili.

**Caratteristiche:** Dentatura alterna a 30° con angolo di taglio negativo.

**Materiale:** Per pannelli bilaminati, in truciolare o MDF.

| D<br>mm        | B<br>mm | b<br>mm | d<br>mm | Z  | NL<br>FT | Code<br>Codice | SAP<br>SAP |
|----------------|---------|---------|---------|----|----------|----------------|------------|
| <b>new</b> 185 | 2,4     | 1,6     | 20      | 60 |          | LP67M 001P     | F03FS07261 |
| <b>new</b> 250 | 2,8     | 1,8     | 30      | 80 |          | LP67M 002P     | F03FS07262 |
| <b>new</b> 300 | 2,8     | 1,8     | 30      | 96 |          | LP67M 003P     | F03FS07263 |

Laminates  
Laminati

| Ultimate<br>Eccellente | High<br>Ottimo | Good<br>Buono |
|------------------------|----------------|---------------|
|------------------------|----------------|---------------|