


IMPULSE

Push-latch

- > Opening and closing system for doors without handles, available in a wide range of versions and finishes, to adapt to all needs.
- > The embedded version is offered with two different opening forces, depending on the desired effect or the type of furniture.
- > The magnetic option, together with our reverse-opening MESUCO 143 hinge, enables the door to be perfectly closed.
- > By means of a simple push, IMPULSE allows for the complete opening of doors and drawers.



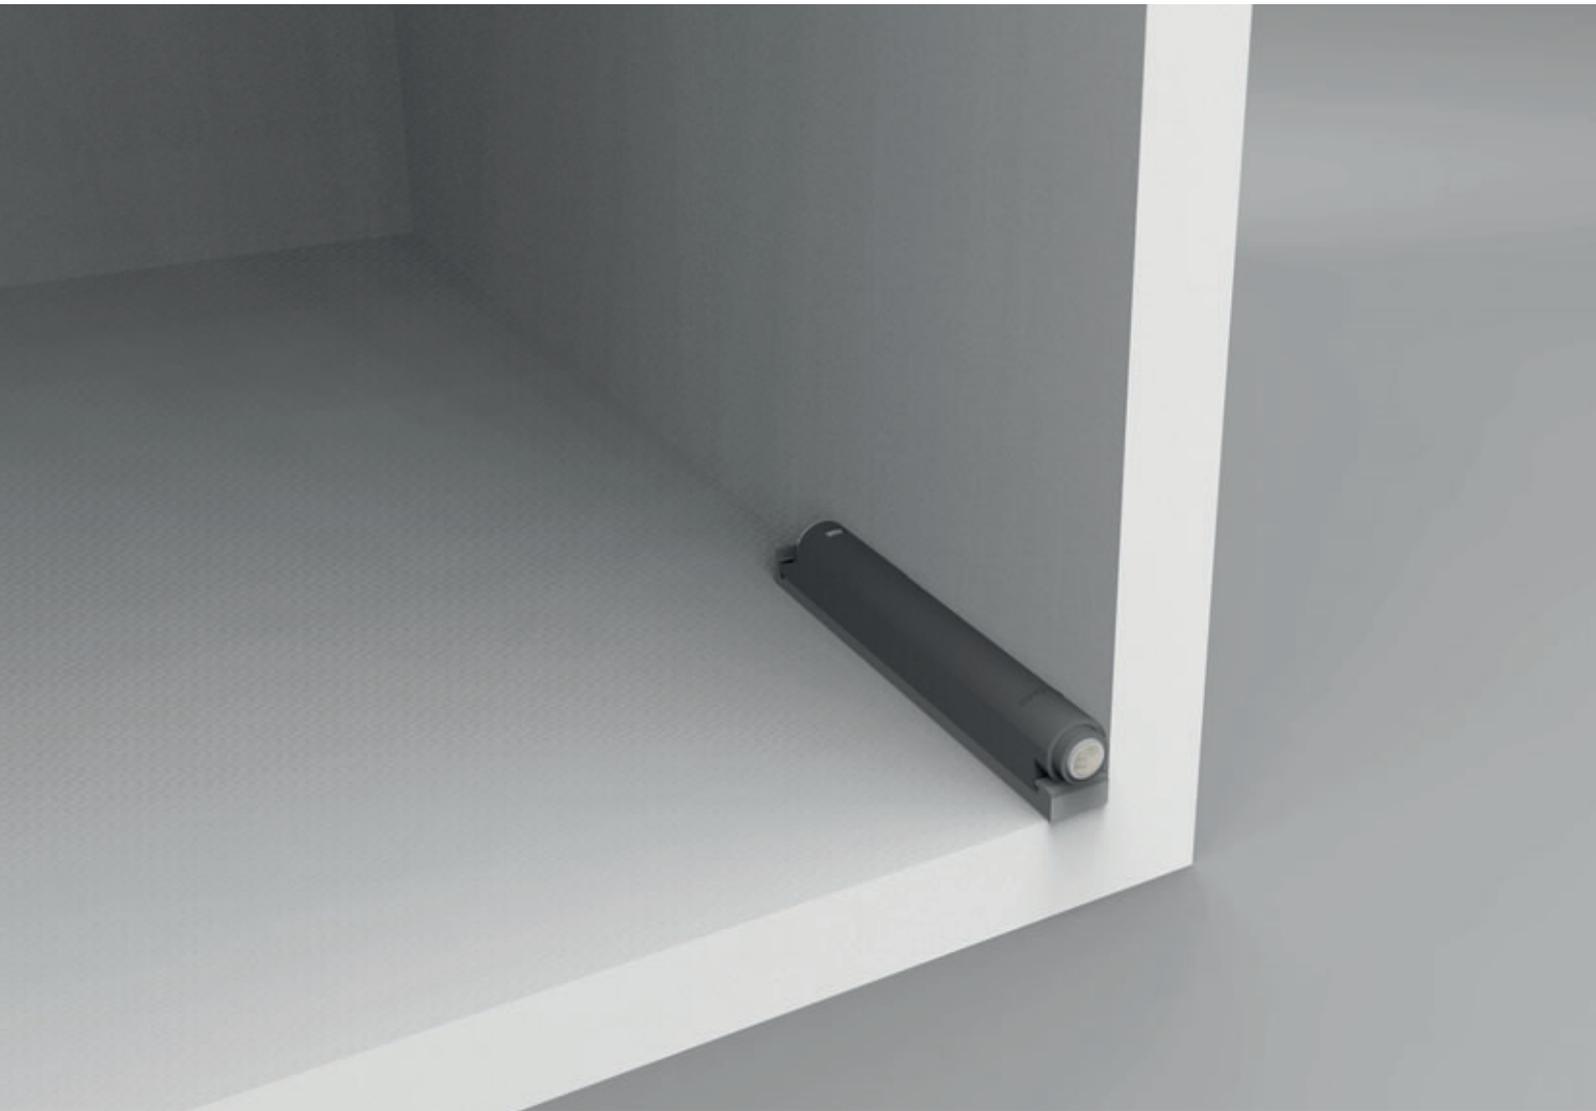

IMPULSE

Push-latch

			Hinges Standard Opening	Hinges MESUCO 143 Reverse Opening	Runners Gravity Self-closing
Embedded	Magnetic	20mm	—	✓	—
		40mm	—	✓	—
	With stop	20mm	✓	✗	✓
		40mm	✓	✗	✓
Lay-on	Magnetic	20mm	—	✓	—
		40mm	—	✓	—
	With stop	20mm	✓	✗	✓
		40mm	✓	✗	✓


The push-latch is incompatible with mechanical closing runners.

pp.

1	PUSH-LATCH SERIES AND TECHNICAL DATA	12
■	Embedded push-latch Ø10	12
■	Base plate for embedded push-latch Ø10	13
■	Lay-on push-latch	14
■	Base plate for lay-on push-latch	15

1 PUSH-LATCH SERIES

Embedded Ø10

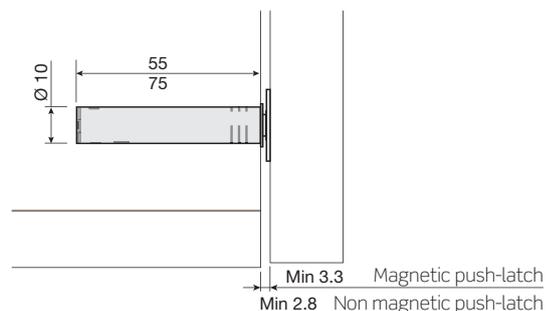

Magnetic push-latch Ø10 with adhesive stop (1.5 Kg. leverage)

	Ejection distance: 20 mm Body length: 55 mm (short)	Ejection distance: 40 mm Body length: 75 mm (long)	
White RAL 9001	215.318.003	215.338.001	100
Grey RAL 7035	215.318.084	215.338.082	
Grey RAL 7043	215.318.316	215.338.314	

Magnetic push-latch Ø10 with adhesive stop (2.25 Kg. leverage)

	Ejection distance: 20 mm Body length: 55 mm (short)	Ejection distance: 40 mm Body length: 75 mm (long)	
White RAL 9001	215.618.001	215.938.004	100
Grey RAL 7035	215.618.082	215.938.085	
Grey RAL 7043	215.618.314	215.938.310	

Each reference consists of 1 fitting and an adhesive closing stop.

Push-latch Ø10 (1.5 Kg. leverage)

	Ejection distance: 20 mm Body length: 55 mm (short)	Ejection distance: 40 mm Body length: 75 mm (long)	
White RAL 9001	215.218.006	215.238.004	100
Grey RAL 7035	215.218.080	215.238.085	
Grey RAL 7043	215.218.312	215.238.310	

Push-latch Ø10 (2.25 Kg. leverage)

	Ejection distance: 20 mm Body length: 55 mm (short)	Ejection distance: 40 mm Body length: 75 mm (long)	
White RAL 9001	215.518.004	215.838.000	100
Grey RAL 7035	215.518.085	215.838.081	
Grey RAL 7043	215.518.310	215.838.313	

Magnetic push-latch Ø10 with screw-fixed stop (1.5 Kg. leverage)

	Ejection distance: 20 mm Body length: 55 mm (short)	Ejection distance: 40 mm Body length: 75 mm (long)	
White RAL 9001	215.418.000	215.438.005	100
Grey RAL 7035	215.418.081	215.438.086	
Grey RAL 7043	215.418.313	215.438.311	

Magnetic push-latch Ø10 with screw-fixed stop (2.25 Kg. leverage)

	Ejection distance: 20 mm Body length: 55 mm (short)	Ejection distance: 40 mm Body length: 75 mm (long)	
White RAL 9001	215.718.005	216.038.001	100
Grey RAL 7035	215.718.086	216.038.082	
Grey RAL 7043	215.718.311	216.038.314	

Each reference consists of 1 fitting, 1 end plate and Ø3x12 screw.




■ Base plate for embedded push-latch Ø10

Screw-fix base plate.

		Without stop	With stop	
White	RAL 9001	214.500.005	214.600.002	100
Grey	RAL 7035	214.500.086	214.600.083	
Grey	RAL 7043	214.500.145	214.600.142	

Screw Ø3x12 pozi, ref. 982.112.036, recommended.

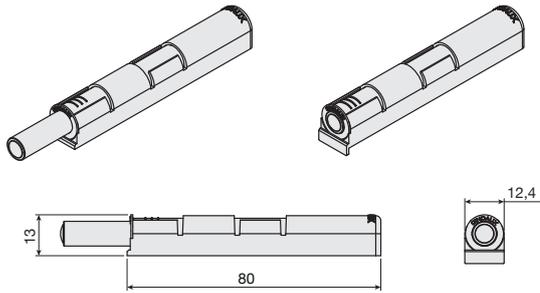

Assembly

Push-latch Ø10

Min 55

Push-latch Ø10

Min 75

Fixing stop

1

32

10

2.1

2.2

Regulation

+ 4mm

■ Lay-on

Magnetic push-latch with adhesive stop (1.5 Kg. leverage)

Length of extension		20mm.	40mm.	
White	RAL 9001	213.020.006	213.040.004	100
Black	RAL 9005	213.020.021	213.040.026	
Grey	RAL 7040	213.020.312	213.040.310	

Each reference consists of 1 fitting and an adhesive closing stop.



Push-latch (1.5 Kg. leverage)

Length of extension		20mm.	40mm.	
White	RAL 9001	213.120.003	213.140.001	100
Black	RAL 9005	213.120.025	213.140.023	
Grey	RAL 7040	213.120.316	213.140.314	



Magnetic push-latch with screw-fixed stop (1.5 Kg. leverage)

Length of extension		20mm.	40mm.	
White	RAL 9001	213.820.003	213.840.001	100
Black	RAL 9005	213.820.025	213.840.023	
Grey	RAL 7040	213.820.316	213.840.314	


Each reference consists of 1 fitting, 1 end plate with Ø3x12 screw.





■ Mounting plate fitting



Clip the body to the front of the base plate.

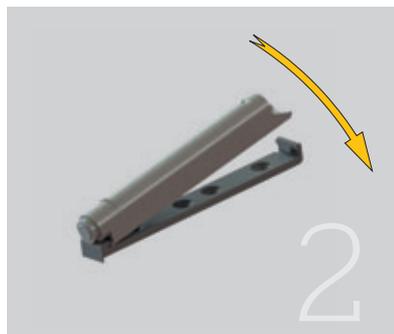

Press the body onto the back of the base plate until fixed.

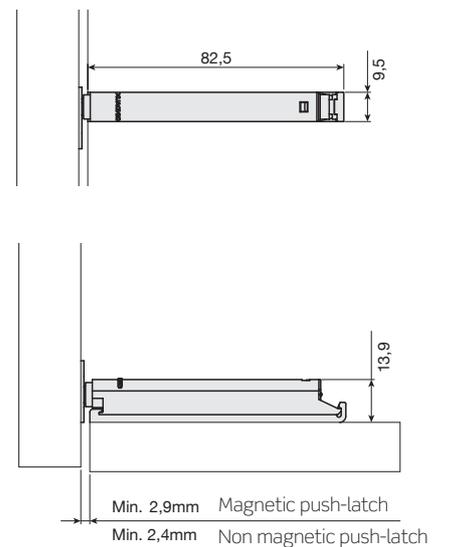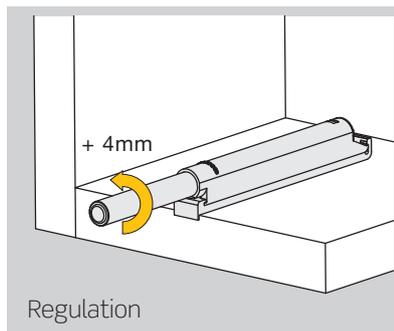

■ Base plate for lay-on push-latch

Dowel-fix base plate without stop.

				
White	RAL 9001	214.000.006		
Black	RAL 9005	214.000.021	100	
Grey	RAL 7040	214.000.312		



Screw-fix base plate with stop.

				
White	RAL 9001	214.100.003		
Black	RAL 9005	214.100.025	100	
Grey	RAL 7040	214.100.316		




Screw-fix base plate without stop.


				
White	RAL 9001	214.200.000		
Black	RAL 9005	214.200.022	100	
Grey	RAL 7040	214.200.313		




Screw-fix base plate without stop

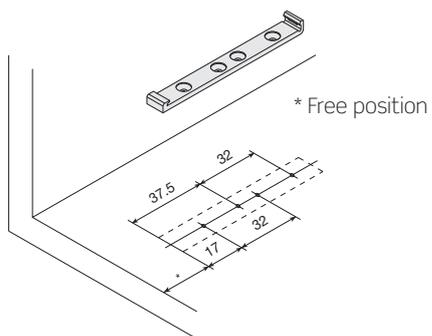

Screw-fix base plate with stop



Dowel-fix base plate without stop

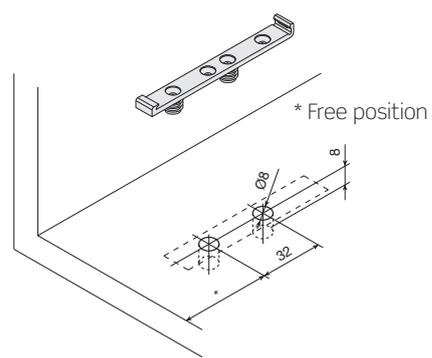

Dowel-fix base plate without stop
System 32

