



*A completely new touch.*



**G\* GRASS®**

||| > **tipmatic**

Fitting systems for  
handle-free furniture doors.

## Tipmatic

Comfortably open handle-free furniture.



**The elaborate interaction of magnet, Tipmatic pin and hinges without closing mechanism facilitates the comfortable design solution for hinged doors.**

Simply and gently tapping the drawer front makes the door open virtually automatically. The doors swing open to a convenient angle, making it comfortable and easy to grip the handle-free panel to open it further. When closing, the doors are held shut precisely and reliably via the magnet's large catch range. A handle is no longer required for opening and closing the door. Handle-free drawer fronts provide designers and architects with a lot of creative freedom when planning the furniture designs.

Grass Tipmatic Plus is designed for hinges without closing mechanism. It does not require any special hinges with opening spring. Tipmatic can be used for wooden, aluminium and glass doors and is suitable for the complete hinge systems Nexis Impresso, Nexis Click-on, Snap-On 3000 and Twist Lock 4000.

**Unique product features for maximum customer benefit.**

Grass Tipmatic supports the design for handle-free hinged doors with the following product features:

- Doors open by gently tapping the front.
- Magnets keep the doors closed precisely and reliably.
- No handle is required to open the doors – handle-free fronts provide designers and architects with a lot of creative freedom when planning their designs.
- Compatible with all hinges without closing mechanism.
- Large magnet catch range – reliable closing of the doors.
- Integrated, self-locking and toolless depth adjustment – adjusting the front gap from 2.5 to 5.5 mm.
- The Tipmatic pin can be drilled into the front of the cabinet or used with an adapter plate.

**Tipmatic consists of two elements:**

The pencil-shaped Tipmatic pin and the magnetic counterpart in the door. The Tipmatic pin can be mounted with the aid of adapter plates or drilled into the front of the cabinet. This makes the element virtually invisible. It disappears into the side of the cabinet – the simple design harmonises with the calm exterior effect of handle-free furniture.

A quick tap – and handle-free furniture doors open virtually automatically.



**This exclusive solution for handle-free furniture doors comprises a combination of hold-closed unit, ejector element and hinges without closing mechanism, and will turn any cabinet construction into something special.**

A short tap is enough and the cabinet door opens to a wide angle. Once closed, the door remains shut and hides its secret until the next tap.

No handles interrupt the furniture's linear, modern design which facilitates the combination of calmness and harmony with aesthetics. What else can a furniture designer wish for?

Grass Tipmatic Plus is designed for hinges without closing mechanism. It does not require any special hinges with opening spring. Hinges of the Nexis Impresso and Nexis Click-on series can be equipped with Tipmatic Plus – even retrospectively – with little installation effort. Mirror doors in combination with Tipmatic Plus Mirro are a particular highlight.

### The advantages are clear.

Grass Tipmatic Plus impresses with its simplicity and distinguishes itself with the following product features:

- Gently tapping the front causes the doors to open to a wide angle.
- Magnets keep the doors closed precisely and reliably.
- No handle is required to open the doors – handle-free drawer fronts provide designers and architects with a lot of creative freedom when planning their designs.
- Compatible with all hinges of the Nexis Impresso and Nexis Click-on series without closing mechanism.
- Can be added retrospectively due to its easy installation
- Suitable for existing systems such as Soft-close or illuxo

### The components of Tipmatic Plus:

Firstly, Tipmatic Plus consists of the ejector element: this is made up of the adapter (Impresso, Click-on, 170° or Mirro) and the ejector, and can be installed on the hinge without any tools. Secondly, Tipmatic Plus consists of the hold-closed unit: this in turn is made up of the magnetic pin and the counterplate. While the magnetic pin is installed in the interior of the cabinet using an adapter plate, the counterplate is glued or screwed onto the door. Thus using Tipmatic Plus results in a holistic system which makes opening handle-free furniture an experience.

# Tipmatic

For handle-free wooden doors and aluminium frame doors.




- Gently tapping the front causes the doors to open to a convenient angle
- Any hinges without closing mechanism can be used
- Large magnet catch range – closes doors reliably
- Gap adjustment from 2.5 to 5.5 mm with integrated, self-locking and toolless depth adjustment feature
- Mounting on the front side of the cabinet or with an adapter plate

||| > tipmatic

## Tipmatic pin



- Incl. magnet, Ø 15 x 8 mm (hole edge cover 1 mm)
- Hole drilled from the front
- Plastic RAL 7036, platinum grey



## For drilling

Item No.


68873-06

PU 25 pieces

## Adapter plate for line drilling



- Suitable for line boring 28 and 37 mm
- Fixing with Euro screws (6.3 x 13.5)
- Plastic RAL 7035, light grey



## For Euro screws

Item No.


63310-40

PU 25 pieces

## Frame adapter plate



- Quick upgrade installation
- Fixing with wood screws (3.5 x 13)
- Plastic RAL 7035, light grey



## For screw fixing

Item No.


63311-40

PU 25 pieces

## Linear adapter plate



- Design solution – also suitable for insets
- For fixing use wood screws (3.5 x 13)
- Plastic RAL 7035, light grey



## For screw fixing


Item No.

63309-40


PU 25 pieces

### Mounting for full and half overlay wooden doors

#### Mounting on front side

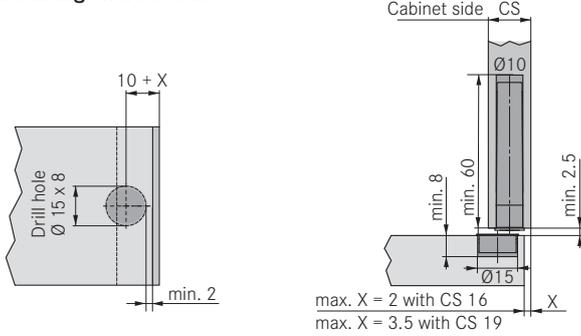


#### Mounting with adapter plates

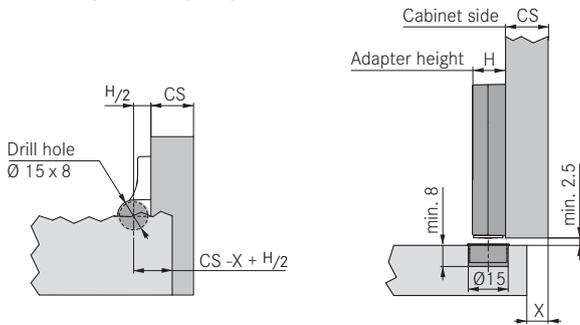


### Mounting for inset wooden doors

#### Mounting with linear adapter plate

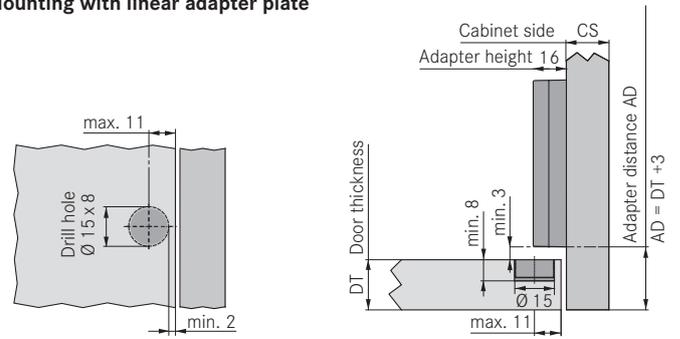


### Mounting for full and half overlay aluminium frame doors

#### Mounting on front side

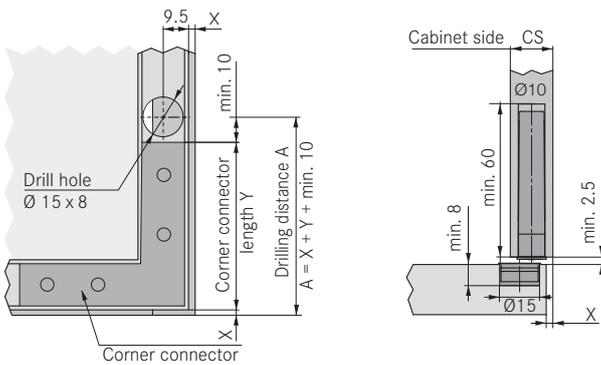


#### Mounting with adapter plates

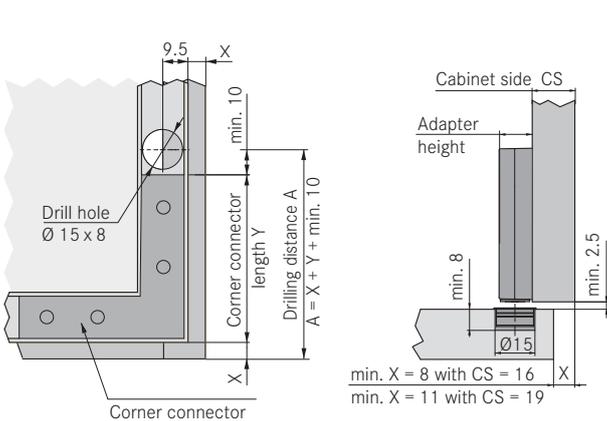

### Mounting for inset aluminium frame doors

#### Mounting with linear adapter plate

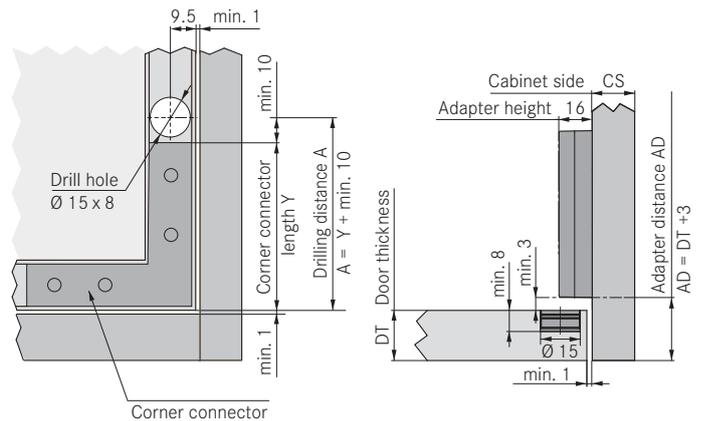

# Tipmatic

For handle-free glass and mirror doors.



- Gently tapping the front causes the doors to open to a convenient angle
- All glass and mirror door hinges without closing mechanism can be used
- Large magnet catch range – closes doors reliably
- Front gap adjustment from 2.5 to 5.5 mm with integrated, self-locking and toolless depth adjustment feature
- Mounting with linear adapter plate

tipmatic

## Tipmatic pin for glass and mirror doors



- Incl. magnet,  $\text{Ø} 20 \times 4$  mm
- Use with linear adapter plate
- For glass and mirror doors
- Plastic RAL 7036, platinum grey

Item No.

68286-06


PU 25 pieces

## Linear adapter plate

For screw fixing



- Design solution – also suitable for insets
- For fixing use wood screws ( $3.5 \times 13$ )
- Plastic RAL 7035, light grey



Item No.


63309-40

PU 25 pieces


## Mounting for full and half overlay glass and mirror doors

## Mounting for inset glass and mirror doors

### Mounting with linear adapter plate

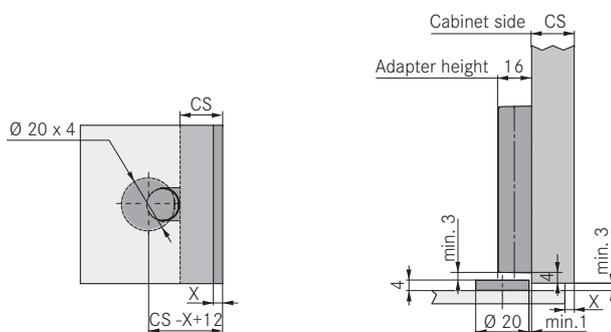


### Mounting with linear adapter plate

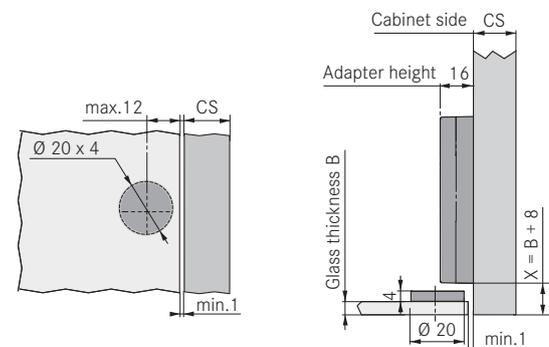

#### Installation note:

Before gluing the magnet the adhesive area must be carefully degreased.

### Recommended positions

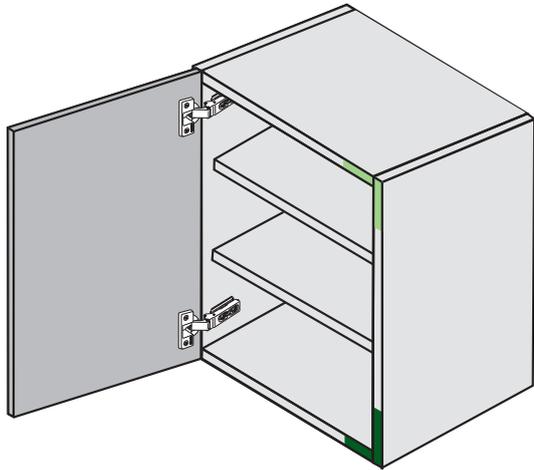

#### For the wall unit:

Position in the region of the lower corner across from the hinge

#### For the base unit:

Position in the region of the upper corner across from the hinge


#### General note regarding the mounting position:

The Tipmatic element is mounted across from the hinge, either by drilling into the front side of the furniture cabinet or with our adapter plates, which are available in different versions.


### Front gap adjustment

#### Front gap adjustment with integrated "toolless depth adjustment" feature

The front gap can be adjusted with the Tipmatic drawer.

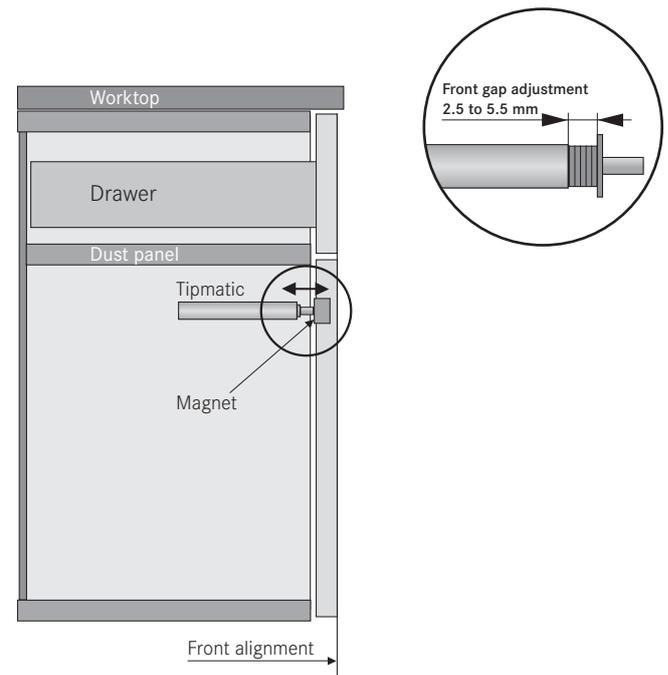

### Drilling jig for adapter plates and Tipmatic pin

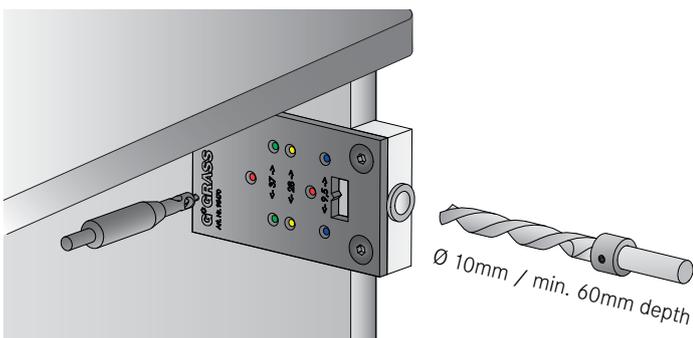

#### Item No.

95470

PU 1 piece

The Grass drilling jig for Tipmatic can be used to drill the holes for all types of adapter plates and the Tipmatic pin.

#### Information:

Drill bits are not included!

### Pilot drill bit Ø 3.5 mm




#### Item No.

35692

PU 1 piece

### Drill bit with stop ring Ø 10 mm



#### Item No.

38823

PU 1 piece

# Tipmatic Plus Impresso


For Nexis Impresso hinges without closing mechanism.



- Gently tapping the front causes the doors to open to a convenient angle
- Compatible with all hinges of the Nexis Impresso series without closing mechanism, see pages 16 – 17
- Can also be retrofitted thanks to its simple assembly

tipmatic-plus

## Tipmatic Plus Impresso set

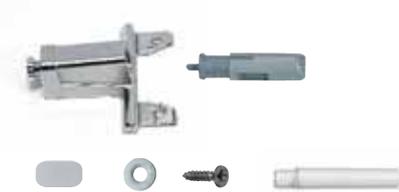


- 1 set consists of:
- 1 Tipmatic Plus Impresso adapter
  - 1 Tipmatic Plus ejector
  - 1 counterplate for gluing
  - 1 counterplate for screw fixing incl. screw
  - 1 magnetic pin

### Item No.

924.275.55.0315

PU 100 sets



## Tipmatic Plus Impresso adapter



Tipmatic Plus Impresso adapter for Nexis Impresso hinges

### Item No.

924.275.55.0015

PU 100 pieces

## Tipmatic Plus ejector



Tipmatic Plus ejector for Tipmatic Plus Impresso adapter

### Item No.

924.075.00.0075

PU 100 pieces

## Linear adapter plate



- Linear adapter plate for magnetic pin
- Design solution, also suitable for insets
  - Fixing with wood screws (3.5 x 13 mm)

### Item No.

514.000.36.0439

PU 100 pieces

## Frame adapter plate



- Frame adapter plate for magnetic pin
- Quick upgrade installation
  - Fixing with wood screws (3.5 x 13 mm)

### Item No.

514.000.36.0539

PU 100 pieces

## Magnetic pin and counterplates



- 1 set consists of:
- 1 magnetic pin
  - 1 counterplate for gluing
  - 1 counterplate for screw fixing incl. screw


### Item No.

646.000.29.0039


PU 100 sets

### Adapter plate position


#### Frame adapter plate

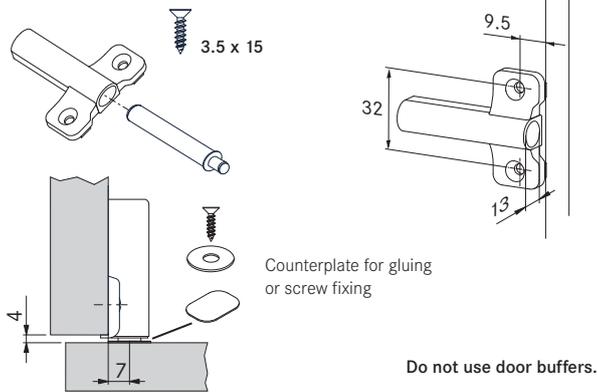

#### Linear adapter plate

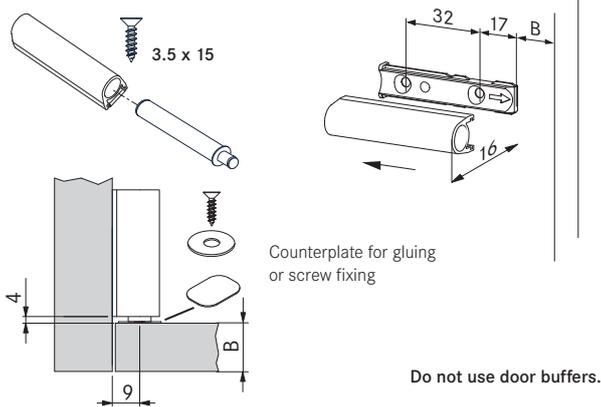

### Recommended position for Tipmatic Plus Impresso

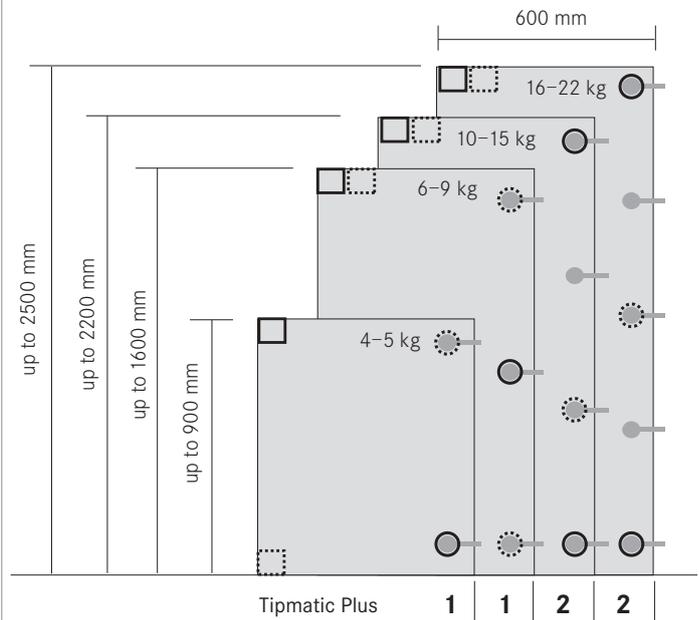

- Recommended position for Tipmatic Plus Impresso
- Possible position for Tipmatic Plus Impresso
- Counterplate position (on the same level as the magnetic pin). One magnetic pin per door.
- Possible counterplate position (on the same level as the magnetic pin). One magnetic pin per door.

### Important notes

**Tipmatic Plus Impresso is only suitable for hinges without holding spring.**

For framed doors we recommend Tipmatic Plus Click-on.


**Ensure that the surface is clean and fully degreased before gluing the adhesive plate.**

If Tipmatic Plus is used in conjunction with a different hold-closed system, Grass does not provide any guarantees.

When fitting Grass furniture hardware, the instructions in the latest sales literature have to be followed in detail; the company cannot accept any liability in the case of incorrect handling. If you require additional information regarding installation and fitting, please contact one of our plants directly.

Our staff will be happy to help.

### Installation

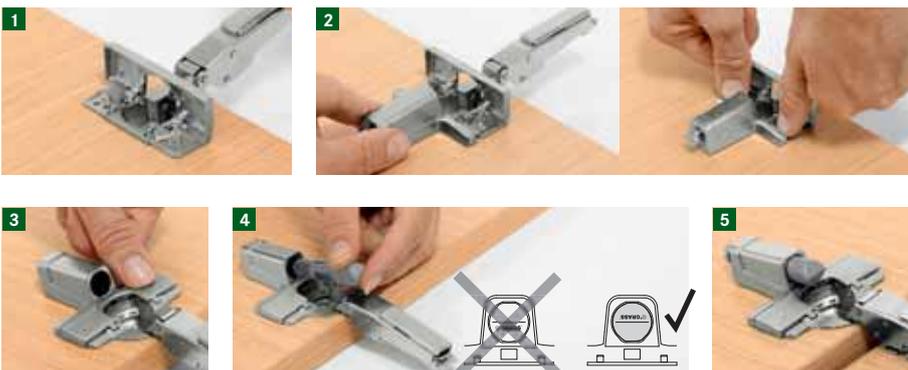

#### Tipmatic Plus Impresso – quick and easy fitting.

- 1 Remove door from cabinet, remove hinge arm cover cap (where applicable) and open hinge cup cover.
- 2 Insert Tipmatic Plus Impresso adapter squarely onto both seats in the hinge cup, make sure it fits and press down firmly.
- 3 Push the hinge cup cover fully back into place. The adapter should now rest flat on the door.
- 4 With the flatter side facing downwards, push the Tipmatic ejector fully into the adapter opening.
- 5 Clip door back onto the mounting plates, adjust front gap and replace hinge arm cover cap (where applicable).

# Tipmatic Plus Click-on

For Nexis Click-on hinges without closing mechanism.



- Gently tapping the front causes the doors to open to a convenient angle
- Compatible with all hinges of the Nexis Click-on series without closing mechanism, see pages 18 – 19
- Can also be retrofitted thanks to its simple assembly


tipmatic-plus

## Tipmatic Plus Click-on set



- 1 set consists of:
- 1 Tipmatic Plus Click-on adapter
  - 1 Tipmatic Plus ejector
  - 1 counterplate for gluing
  - 1 counterplate for screw fixing incl. screw
  - 1 magnetic pin

Item No.  
924.275.40.0315  
PU 100 sets



## Tipmatic Plus Click-on adapter



Tipmatic Plus Click-on adapter for Nexis Click-on hinges

Item No.  
924.275.40.0015  
PU 100 pieces

## Tipmatic Plus ejector



Tipmatic Plus ejector for Tipmatic Plus Click-on adapter

Item No.  
924.075.00.0075  
PU 100 pieces

## Linear adapter plate



Linear adapter plate for magnetic pin

- Design solution, also suitable for insets
- Fixing with wood screws (3.5 x 13 mm)

Item No.  
514.000.36.0439  
PU 100 pieces

## Frame adapter plate



Frame adapter plate for magnetic pin

- Quick upgrade installation
- Fixing with wood screws (3.5 x 13 mm)

Item No.  
514.000.36.0539  
PU 100 pieces

## Magnetic pin and counterplates




- 1 set consists of:
- 1 magnetic pin
  - 1 counterplate for gluing
  - 1 counterplate for screw fixing incl. screw

Item No.  
646.000.29.0039  
PU 100 sets



### Adapter plate positions

### Recommended position for Tipmatic Plus Click-on

#### Frame adapter plate

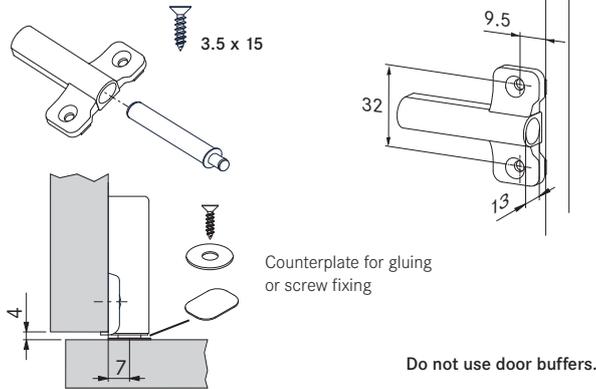

#### Linear adapter plate

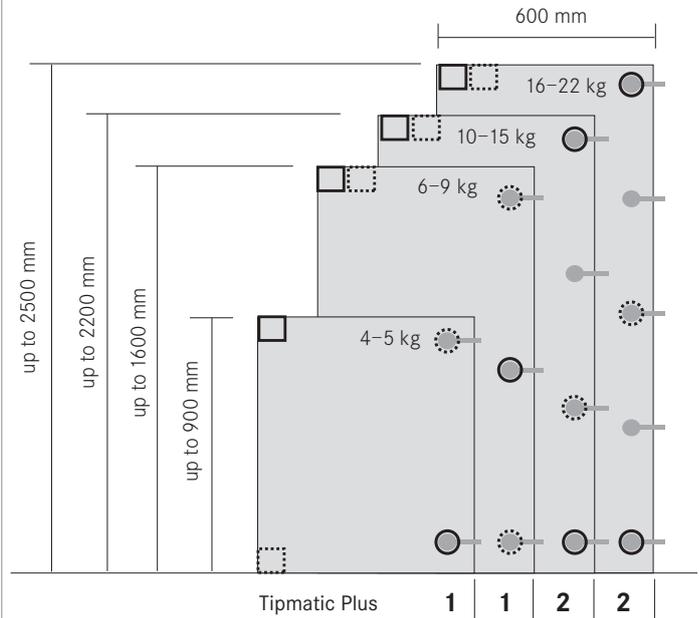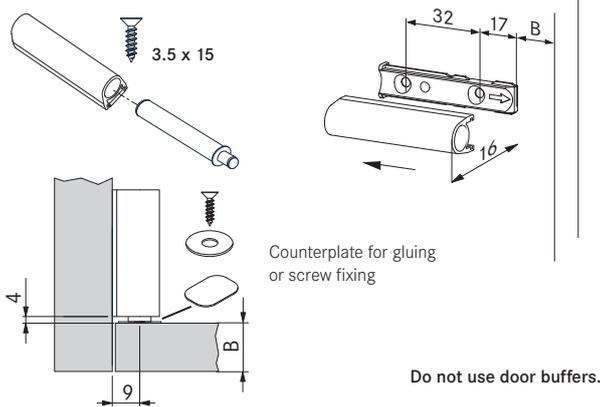

- Recommended position for Tipmatic Plus Click-on
- Possible position for Tipmatic Plus Click-on
- Counterplate position (on the same level as the magnetic pin). One magnetic pin per door.
- Possible counterplate position (on the same level as the magnetic pin). One magnetic pin per door.

### Important notes

**Tipmatic Plus Click-on is only suitable for hinges without holding spring.**

**Ensure that the surface is clean and fully degreased before gluing the adhesive plate.**

If Tipmatic Plus is used in conjunction with a different hold-closed system, Grass does not provide any guarantees.

When fitting Grass furniture hardware, the instructions in the latest sales literature have to be followed in detail; the company cannot accept any liability in the case of incorrect handling. If you require additional information regarding installation and fitting, please contact one of our plants directly.

Our staff will be happy to help.

### Installation



#### Tipmatic Plus Click-on – quick and easy fitting.

- 1 Remove hinge arm cover cap (where applicable).
- 2 Insert Tipmatic Plus Click-on with the two small hooks underneath into the recesses in the hinge cup, at a slight angle.
- 3 Push down both sides of the adapter simultaneously until it engages with an audible 'click'.
- 4 With the flatter side facing downwards, push the Tipmatic ejector fully into the adapter opening.
- 5 Adjust front gap, put on hinge arm cover cap (where applicable).

## Tipmatic Plus 170°

For Nexis Impresso and Nexis Click-on 170° wide-angle hinges without closing mechanism.



- Gently tapping the front causes the doors to open to a convenient angle
- For Nexis Impresso 170° wide-angle hinges without closing mechanism, see page 16
- For Nexis Click-on 170° wide-angle hinges without closing mechanism, see page 18
- Can also be retrofitted thanks to its simple assembly

|||> tipmatic-plus

### Tipmatic Plus 170° set



1 set consists of:

- 1 Tipmatic Plus 170° adapter
- 1 Tipmatic Plus ejector
- 1 counterplate for gluing
- 1 counterplate for screw fixing incl. screw
- 1 magnetic pin

Item No.

924.275.46.0315

PU 100 sets

### Tipmatic Plus 170° adapter



Tipmatic Plus 170° adapter for Nexis Impresso and Nexis Click-on 170° wide-angle hinges

Item No.

924.275.46.0015

PU 100 pieces

### Tipmatic Plus ejector



Tipmatic Plus ejector for Tipmatic Plus Impresso adapter

Item No.

924.075.00.0075

PU 100 pieces

### Linear adapter plate



Linear adapter plate for magnetic pin

- Design solution, also suitable for insets
- Fixing with wood screws (3.5 x 13 mm)

Item No.

514.000.36.0439

PU 100 pieces

### Frame adapter plate



Frame adapter plate for magnetic pin

- Quick upgrade installation
- Fixing with wood screws (3.5 x 13 mm)

Item No.

514.000.36.0539

PU 100 pieces

### Magnetic pin and counterplates



1 set consists of:

- 1 magnetic pin
- 1 counterplate for gluing
- 1 counterplate for screw fixing incl. screw

Item No.


646.000.29.0039

PU 100 sets



### Adapter plate positions

### Recommended position for Tipmatic Plus Click-on

#### Frame adapter plate

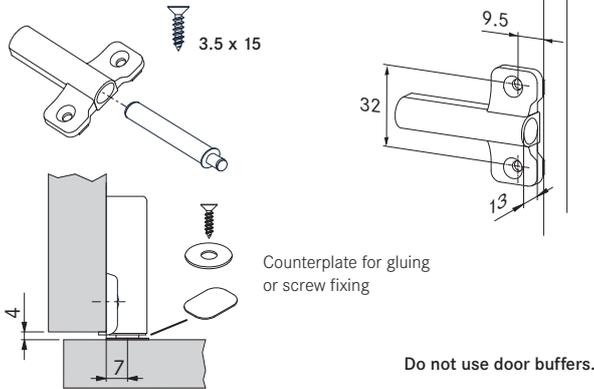

#### Linear adapter plate

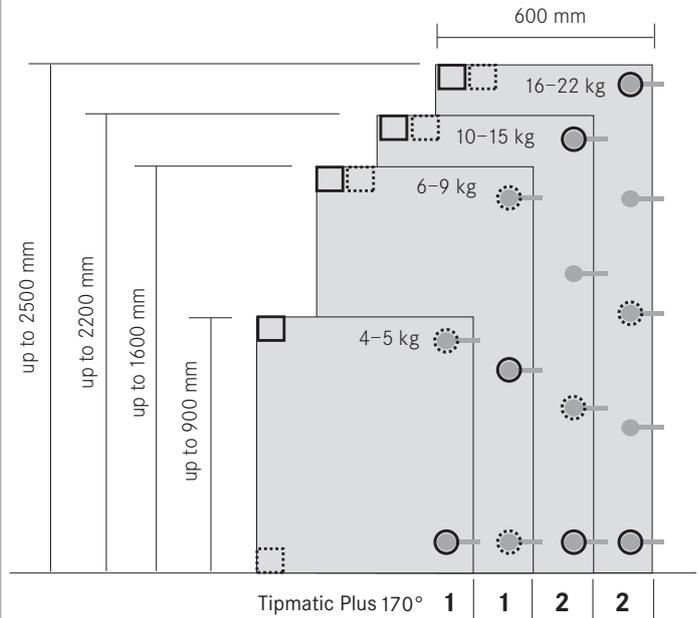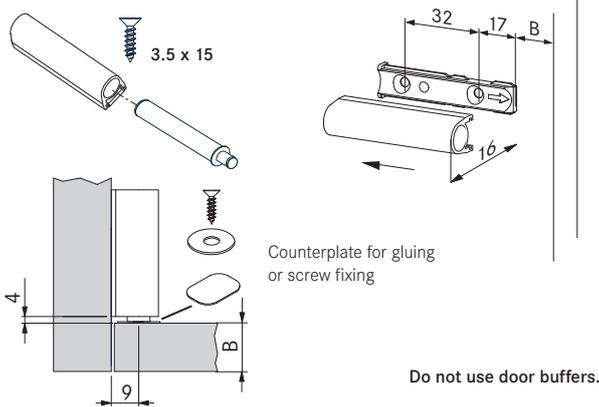

- Recommended position for Tipmatic Plus 170°
- Possible position for Tipmatic Plus 170°
- Counterplate position (on the same level as the magnetic pin). One magnetic pin per door.
- Possible counterplate position (on the same level as the magnetic pin). One magnetic pin per door.

### Important notes

**Tipmatic Plus 170° is only suitable for hinges without holding spring.**

**Ensure that the surface is clean and fully degreased before gluing the adhesive plate.**

If Tipmatic Plus is used in conjunction with a different hold-closed system, Grass does not provide any guarantees.

When fitting Grass furniture hardware, the instructions in the latest sales literature have to be followed in detail; the company cannot accept any liability in the case of incorrect handling. If you require additional information regarding installation and fitting, please contact one of our plants directly. Our staff will be happy to help.

### Installation


#### Tipmatic Plus 170° with Nexis Impresso

#### Tipmatic Plus 170° with Nexis Click-on





#### Tipmatic Plus 170° – quick and easy fitting.

1 With the flatter side facing downwards, push the Tipmatic Plus ejector fully into the adapter opening.



2 Insert the adapter with the two small hooks underneath into the recesses in the hinge arm, at a slight angle.

3 Push down the Tipmatic Plus 170° adapter until it engages with an audible “click”.

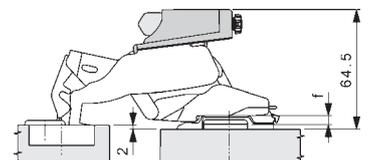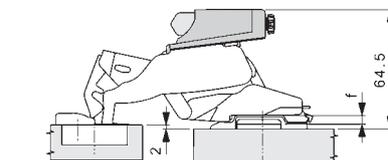

Drawings with mounting plate, height 02

## Tipmatic Plus Mirro

For Nexis Click-on Mirro and Nexis Click-on Mirro -15° hinges without closing mechanism.



- Gently tapping the front causes the doors to open with to a convenient angle
- For Nexis Mirro and Nexis Mirro -15° hinges without closing mechanism, see page 19
- Can also be retrofitted thanks to its simple assembly

|||> tipmatic-plus

### Tipmatic Plus Mirro set



1 set consists of:

- 1 Tipmatic Plus Mirro adapter
- 1 Tipmatic Plus ejector
- 1 counterplate for gluing
- 1 magnetic pin

Item No.

924.275.38.0315

PU 100 sets

### Tipmatic Plus Mirro adapter



Tipmatic Plus Mirro adapter for Nexis Click-on Mirro hinges

Item No.

924.275.38.0015

PU 100 pieces

### Tipmatic Plus ejector



Tipmatic Plus ejector for Tipmatic Plus Mirro adapter

Item No.

924.075.00.0075

PU 100 pieces

### Linear adapter plate



Linear adapter plate for magnetic pin

- Design solution, also suitable for insets
- Fixing with wood screws (3.5 x 13 mm)

Item No.

514.000.36.0439

PU 100 pieces

### Frame adapter plate



Frame adapter plate for magnetic pin

- Quick upgrade installation
- Fixing with wood screws (3.5 x 13 mm)

Item No.

514.000.36.0539

PU 100 pieces

### Magnetic pin and counterplate



1 set consists of:

- 1 magnetic pin
- 1 counterplate for gluing

Item No.


646.000.29.0039

PU 100 sets



### Adapter plate positions

### Recommended position for Tipmatic Plus Click-on

#### Frame adapter plate

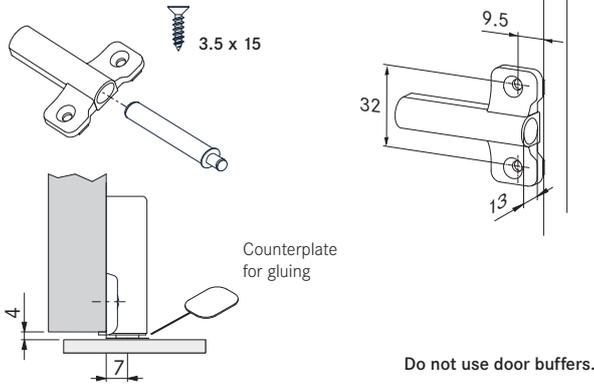

#### Linear adapter plate

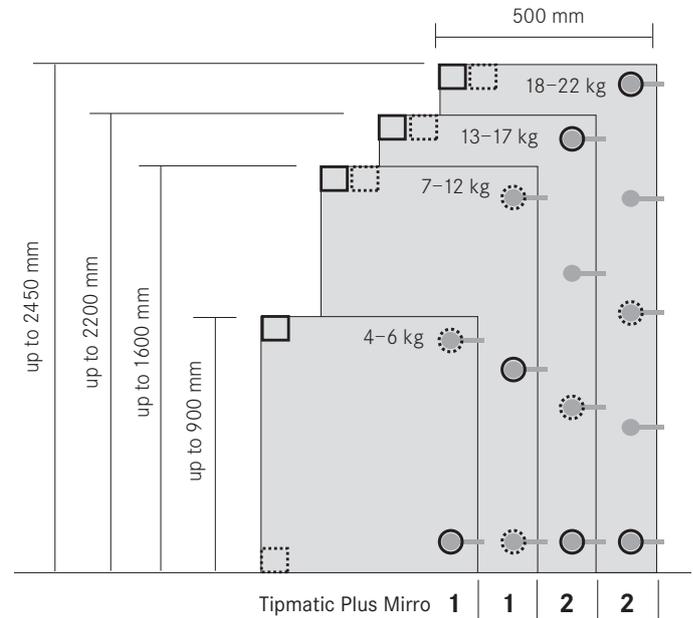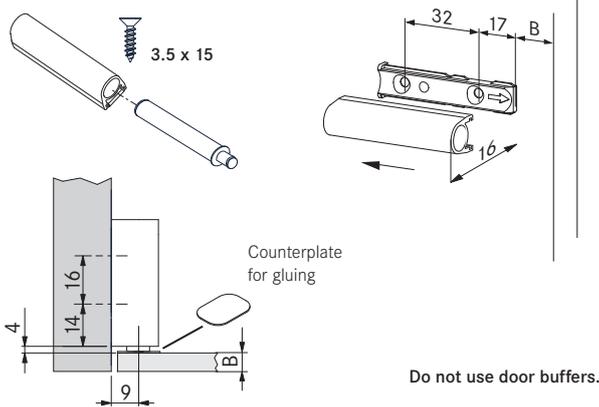

- Recommended position for Tipmatic Plus Mirro
- ⊙ Possible position for Tipmatic Plus Mirro
- Counterplate position (on the same level as the magnetic pin). One magnetic pin per door.
- ⊞ Possible counterplate position (on the same level as the magnetic pin). One magnetic pin per door.

### Important notes

**Tipmatic Plus Mirro is only suitable for hinges without holding spring.**

**Ensure that the surface is clean and fully degreased before gluing the adhesive plate.**

If Tipmatic Plus is used in conjunction with a different hold-closed system, Grass does not provide any guarantees. When fitting Grass furniture hardware, the instructions in the latest sales literature have to be followed in detail; the company cannot accept any liability in the case of incorrect handling. If you require additional information regarding installation and fitting, please contact one of our plants directly. Our staff will be happy to help.


### Installation

### Tipmatic Plus Mirro with Nexis Mirro





#### Tipmatic Plus Mirro – quick and easy fitting.

- 1 Push the Tipmatic Plus ejector into the adapter opening with the flatter side on the left.



- 2 Insert the adapter with the hook underneath into the recess in the hinge arm.
- 3 Push the Tipmatic Plus Mirro adapter towards the back until it engages.

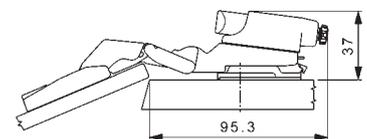

Drawings with mounting plate, height 02

# Nexis Impresso hinges without closing mechanism

For Tipmatic Plus and Tipmatic applications.

Nexis Impresso 100° standard door hinge	full overlay	half overlay	inset	
				
	Drilling pattern	Item No.	Item No.	Item No.
	48/9 and 45/9.5	145.604.35.0015	145.604.35.0815	145.604.35.1515
	42/11 and 45/9.5	◆ 137.604.51.0015	◆ 137.604.51.0815	137.604.51.1515
	PU 125 pieces	PU 125 pieces	PU 125 pieces	

Nexis Impresso 110° standard door hinge	full overlay	half overlay		
				
	Drilling pattern	Item No.	Item No.	
	48/9 and 45/9.5	145.622.35.0015	145.622.35.0815	
	42/11 and 45/9.5	137.622.51.0015	137.622.51.0815	
	PU 125 pieces	PU 125 pieces		

## Opening angle reduction clip 85°



Restricts opening angle to 85° for 110° hinges  
Prevents doors from colliding with fronts or walls  
in corner installations.  
Black plastic

Item No.
641.000.10.0062
PU 1000 pieces

Nexis Impresso 125° standard door hinge	full overlay	half overlay		
				
	Drilling pattern	Item No.	Item No.	
	48/9 and 45/9.5	145.629.35.0015	◆ 145.629.35.0815	
	42/11 and 45/9.5	◆ 137.629.51.0015	◆ 137.629.51.0815	
	PU 125 pieces	PU 125 pieces		

Nexis Impresso 170° wide-angle hinge	full overlay	half overlay		
				
	Drilling pattern	Item No.	Item No.	
	48/9 and 45/9.5	145.765.35.0015	145.765.35.0815	
	42/11 and 45/9.5	137.765.65.0015	137.765.65.0815	
	PU 50 pieces	PU 50 pieces		

## Opening angle reduction clip 125°



Restricts opening angle to 125°  
for 170° wide-angle hinges  
Black plastic

Item No.
641.000.09.9862
PU 250 pieces

Nexis Impresso 95° profiled door hinge	full overlay	half overlay	inset	
				
	Drilling pattern	Item No.	Item No.	Item No.
	48/9 and 45/9.5	145.605.35.0015	145.605.35.0815	145.605.35.1515
	42/11 and 45/9.5	◆ 137.605.51.0015	◆ 137.605.51.0815	◆ 137.605.51.1515
	PU 125 pieces	PU 125 pieces	PU 125 pieces	

◆ on request (minimum quantity required)

### Nexis Impresso +45° angle corner cabinet hinge, inset



Drilling pattern	Item No.
48/9 and 45/9.5	◆ 145.705.35.0315
42/11 and 45/9.5	137.705.51.0315
	PU 125 pieces

### Cover caps for cranking 00

- \* Steel, nickel-plated, blank, Tipmatic Plus compatible
- \*\* Plastic, black, blank, Tipmatic Plus compatible

### Item No.

514.300.21.0215

514.000.22.9762

PU 1000 pieces

### Cover caps for cranking 08 and 15

- \* Steel, nickel-plated, blank, Tipmatic Plus compatible
- \*\* Plastic, black, blank, Tipmatic Plus compatible

### Item No.


514.300.22.0015

514.000.22.9762


PU 1000 pieces

- \* \*\* on request with individual company logo
- \* \*\* on request with Grass imprint
- \* on request with Grass embossed

### Combi drilling pattern 48/9 and 45/9.5

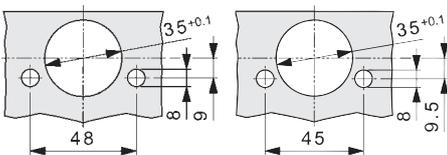

### Combi drilling pattern 42/11 and 45/9.5

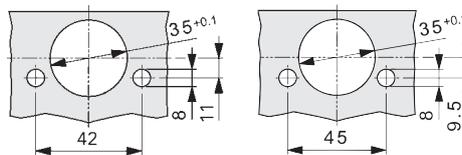

All dimensions in millimetres.

# Nexis Click-on hinges without closing mechanism

For Tipmatic Plus and Tipmatic applications.

Nexis Click-on 100° standard door hinge		full overlay	half overlay	inset	
					
		Drilling pattern	Item No.	Item No.	Item No.
		48/9	145.304.55.0015	145.304.55.0815	145.304.55.1515
		 42/11	◆ 137.304.73.0015	◆ 137.304.73.0815	◆ 137.304.73.1515
		48/9	◆ 145.304.56.0015	◆ 145.304.56.0815	◆ 145.304.56.1515
		 42/11	◆ 137.304.74.0015	◆ 137.304.74.0815	◆ 137.304.74.1515
		PU 250 pieces	PU 250 pieces	PU 250 pieces	

Nexis Click-on 110° standard door hinge		full overlay	half overlay		
					
		Drilling pattern	Item No.	Item No.	
		48/9	145.322.53.0015	145.322.53.0815	
		 42/11	137.322.73.0015	137.322.73.0815	
		48/9	◆ 145.322.54.0015	◆ 145.322.54.0815	
		 42/11	137.322.74.0015	137.322.74.0815	
		PU 250 pieces	PU 250 pieces		

Opening angle reduction clip 85°		Item No.
		641.000.10.0062
Restricts opening angle to 85° for 110° hinges Prevents doors from colliding with fronts or walls in corner installations. Black plastic		PU 1000 pieces

Nexis Click-on 170° wide-angle hinge		full overlay	half overlay		
					
		Drilling pattern	Item No.	Item No.	
		48/9	145.765.53.0015	145.765.53.0815	
		 42/11	137.765.73.0015	137.765.73.0815	
		48/9	◆ 145.765.54.0015	◆ 145.765.54.0815	
		 42/11	137.765.74.0015	137.765.74.0815	
		PU 50 pieces	PU 50 pieces		

Opening angle reduction clip 125°		Item No.
		641.000.09.9862
Restricts opening angle to 125° for 170° wide-angle hinges Black plastic		PU 250 pieces

Nexis Click-on 95° profiled door hinge		full overlay	half overlay	inset	
					
		Drilling pattern	Item No.	Item No.	Item No.
		48/9	145.305.53.0015	145.305.53.0815	145.305.53.1515
		 42/11	◆ 137.304.73.0015	◆ 137.304.73.0815	◆ 137.304.73.1515
		48/9	◆ 145.305.54.0015	◆ 145.305.54.0815	145.305.54.1515
		 42/11	◆ 137.304.74.0015	◆ 137.304.74.0815	◆ 137.304.74.1515
		PU 250 pieces	PU 250 pieces	PU 125 pieces	

◆ on request (minimum quantity required)

### Nexis Click-on +45° angle corner cabinet hinge, inset



Drilling pattern	Item No.
48/9	145.405.53.0315
42/11	137.404.73.0315
48/9	◆ 145.405.54.0315
42/11	137.404.74.0315
PU 125 pieces	

### Nexis Click-on blind corner hinge inset



Drilling pattern	Item No.
48/9	145.405.53.9615
48/9	◆ 145.405.54.9615
PU 125 pieces	

### Nexis Click-on Mirro mirror and glass door hinges



Item No.
299.707.88.0015
PU 50 pieces

### Nexis Click-on Mirro -15° mirror and glass door hinges



Item No.
299.707.88.9815
PU 50 pieces

### Stainless steel adapter for Mirro hinges



Item No.
621.300.20.5017
PU 50 pieces

### Cover caps for cranking 00, +45°, blind corner and Mirro hinges

- \* Steel, nickel-plated, blank, Tipmatic Plus compatible
- \*\* Plastic, black, blank, Tipmatic Plus compatible

Item No.
514.300.21.0215
514.000.22.9762
PU 1000 pieces


### Cover caps for cranking 08 and 15

- \* Steel, nickel-plated, blank, Tipmatic Plus compatible
- \*\* Plastic, black, blank, Tipmatic Plus compatible


Item No.
514.300.22.0015
514.000.22.9762
PU 1000 pieces

- \* \*\* on request with individual company logo
- \* \*\* on request with Grass imprint
- \* on request with Grass embossed

### Drilling patterns for screw-fix version

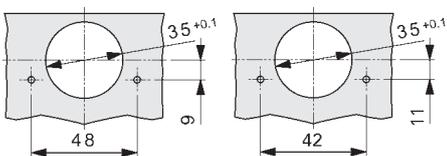



### Drilling patterns for press-fit version

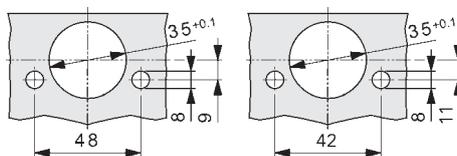


All dimensions in millimetres.

# Nexis Click-on mounting plates


For Nexis Impresso and Nexis Click-on hinges.



Height adjustment  
±2 mm



Side adjustment  
+1/-3 mm




Depth adjustment  
+3/-1 mm


All adjustment options are independent of one another.

## 2D cross mounting plate, 2-point fixing

### Fix with screws



- Steel/Zamak, nickel-plated
- For fixing use wood screws
- Fixing distance 37 mm
- Line boring 32 mm
- Height and depth adjustment via eccentric cam



Height	Item No.
00	314.493.71.0015
02	314.493.71.0215
03	344.493.82.0315
04	314.493.71.0415
06	314.493.71.0615
08	314.493.71.0815
PU 250 pieces	


Must not be used with Mirro hinges.

## 2D cross mounting plate, 2-point fixing

### For Euro screws



- Steel/Zamak, nickel-plated
- For fixing use Euro screws
- Fixing distance 37 mm
- Line boring 32 mm
- Height and depth adjustment via eccentric cam




Height	Item No.
00	317.493.71.0015
02	317.493.71.0215
04	317.493.71.0415
06	317.493.71.0615
08	317.493.71.0815
PU 250 pieces	


Must not be used with Mirro hinges.

## 2D cross mounting plate, 2-point fixing

### With pre-inserted Euro screws





- Steel/Zamak, nickel-plated
- For fixing use pre-inserted Euro screws
- Fixing distance 37 mm
- Line boring 32 mm
- Height and depth adjustment via eccentric cam




Height	Item No.
00	318.493.71.0015
02	318.493.71.0215
03	348.493.82.0315
04	318.493.71.0415
06	318.493.71.0615
08	318.493.71.0815
PU 250 pieces	


Must not be used with Mirro hinges.



Height adjustment  
±2 mm



Side adjustment  
+1/-3 mm



Depth adjustment  
+3/-1 mm


All adjustment options are independent of one another.

**1-part cross mounting plate, 2-point fixing**

**Fix with screws**



- Steel, nickel-plated
- For fixing use wood screws
- Fixing distance 37 mm
- Line boring 32 mm
- Height adjustment via slot




Height	Item No.
00	314.393.81.0015
02	314.393.81.0215
03	344.393.82.0315
04	314.393.81.0415
PU 250 pieces	

**1-part cross mounting plate, 2-point fixing**

**With pre-inserted Euro screws**



- Steel, nickel-plated
- For fixing use pre-inserted 13.5 mm long Euro screws
- Fixing distance 37 mm
- Line boring 32 mm
- Height adjustment via slot




Height	Item No.
00	318.393.81.0015
02	318.393.81.0215
03	348.393.82.0315
04	318.393.81.0415
PU 250 pieces	

**1-part cross mounting plate, 3-point fixing**

**With expansion dowels**



- Steel, nickel-plated
- Fix with Ø 5 mm expansion dowels
- Fixing distance 37 mm
- Line boring 32 mm
- Height adjustment via slot



Height	Item No.
00	319.393.81.0015
02	319.393.81.0215
04	319.393.81.0415
PU 250 pieces	


Plate must not be fastened with power screwdriver.

**1-part mounting plate, 2-point fixing, fixing distance 28 mm**

**With pre-inserted Euro screws**





- Steel, nickel-plated
- For fixing use pre-inserted Euro screws
- Fixing distance 28 mm
- Line boring 32 mm
- Height adjustment via slot




Height	Item No.
00	318.390.81.0015
02	318.390.81.0215
04	318.390.81.0415
PU 250 pieces	

# Nexis Click-on mounting plates


For Nexis Impresso and Nexis Click-on hinges.

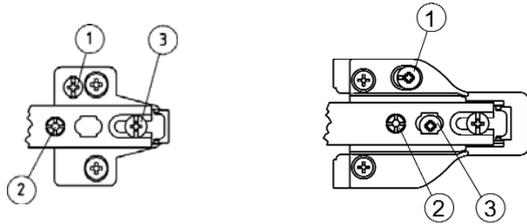

Height adjustment  
± 2 mm



Side adjustment  
+1/-3 mm



Depth adjustment  
+3/-1 mm


All adjustment options are independent of one another.

## 2-part cross mounting plate, 3-point fixing

### Fix with screws



- Steel/Zamak, nickel-plated
- For fixing use wood screws
- Fixing distance 37 mm
- Line boring 32 mm




Height	Item No.
00	315.393.55.0015
02	315.393.55.0215
04	315.393.55.0415
08	315.393.55.0815
18	315.393.55.1815
PU 250 pieces	

## 2-part cross mounting plate, 3-point fixing

### For Euro screws




- Steel/Zamak, nickel-plated
- For fixing use Euro screws
- Fixing distance 37 mm
- Line boring 32 mm



Height	Item No.
00	317.393.56.0015
02	317.393.56.0215
04	317.393.56.0415
08	317.393.56.0815
18	317.393.56.1815
PU 250 pieces	


## 2D special mounting plate for frame construction

### For screw fixing





- Steel/Zamak, nickel-plated
- For fixing use wood screws
- Height and depth adjustment via eccentric cam


Must not be used with Mirro hinges.




Height	Item No.
00	346.290.91.0015
02	346.290.91.0215
04	346.290.91.0415
PU 250 pieces	



Height adjustment  
±2 mm



Side adjustment  
+1/-3 mm




Depth adjustment  
+3/-1 mm

All adjustment options are independent of one another.

System information


### 2D linear mounting plate, 2-point fixing

For screw fixing



- Steel/Zamak, nickel-plated
- For fixing use wood screws
- Height and depth adjustment via eccentric cam

Must not be used with Mirro hinges.




Thickness	Item No.
00	301.390.90.0015
02	301.390.90.0215
04	301.390.90.0415
PU 250 pieces	


Tipmatic

### 1D linear mounting plate, 2-point fixing

For screw fixing



- Steel/Zamak, nickel-plated
- For fixing use wood screws
- Height adjustment via eccentric cam




Thickness	Item No.
00	301.390.91.0015
02	301.390.91.0215
03	344.390.82.0315
04	301.390.91.0415
PU 250 pieces	

Tipmatic Plus

Hinges for Tipmatic Plus


### Fixing screws

#### 191 / 192 Euro screw, nickel-plated



Item No. / Ø 6.3 x 10.5 mm	Item No. / Ø 6.3 x 13 mm
711.331.61.9715	707.331.61.9715
PU 5000 pieces	PU 1000 pieces

#### 198 Chipboard screw, nickel-plated



Item No. / Ø 3.5 x 15 mm
707.333.51.9715
PU 1000 pieces

Mounting plates



**G\*GRASS®**

Grass GmbH  
Furniture fittings  
Grass Platz 1  
6973 Höchst  
Austria

Tel. +43 / 5578 / 701-0  
Fax +43 / 5578 / 701-59

[www.grass.at](http://www.grass.at), [info@grass.eu](mailto:info@grass.eu)