
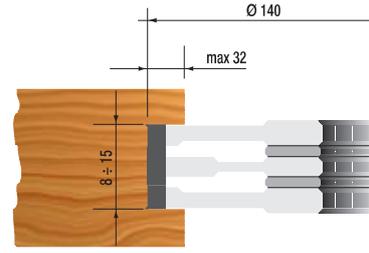


HW ADJUSTABLE CUTTERHEAD WITH REVERSIBLE KNIVES FOR GROOVES

ART. TA

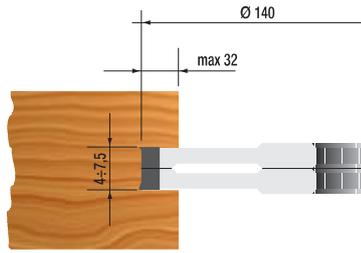


- For precision grooves 4 to 15 mm
- Adjustable by using spacer rings (included)
- Cutterhead in steel with reversible HW knives
- Manual feed (MAN)

Item	D	d	B	Z	V	E _{max}
TA140.07530 A+A	140	30	4÷7,5	4	4	32
TA140.07535 A+A	140	35	4÷7,5	4	4	32
TA140.07630 B	140	30	7,65	2	-	32
TA140.07635 B	140	35	7,65	2	-	32
TA140.15030 A+B+A	140	30	4÷15	4+2	4	32
TA140.15035 A+B+A	140	35	4÷15	4+2	4	32
TA180.07530 A+A	180	30	4÷7,5	8	4	32
TA180.07535 A+A	180	35	4÷7,5	8	4	32
TA180.07630 B	180	30	7,65	2	-	32
TA180.07635 B	180	35	7,65	2	-	32
TA180.15030 A+B+A	180	30	4÷15	8	4	32
TA180.15035 A+B+A	180	35	4÷15	8	4	32

Spare parts:		TA140.075		TA140.076	
		TA180.075		TA180.076	
	Dimensions	Item		Dimensions	Item
Knife	18x18x1,95	Z055.020.N		7,6x12x1,5	Z055.000.N
Knife screw	M4x3,2	Z051.700.R			
Threaded ring	12x1,7	Z060.701.R			
Spur	14x14x1,2	Z055.006.N			
Spur screw	M4x3,2	Z051.700.R			
Threaded ring	10x1,65	Z060.700.R			
Wedge	-	-		6,8	Z056.700.N
Wedge screw	-	-		M5x18	Z051.800.R

HW CUTTERHEADS WITH REVERSIBLE KNIVES FOR "LAMELLO"

ART. TAH

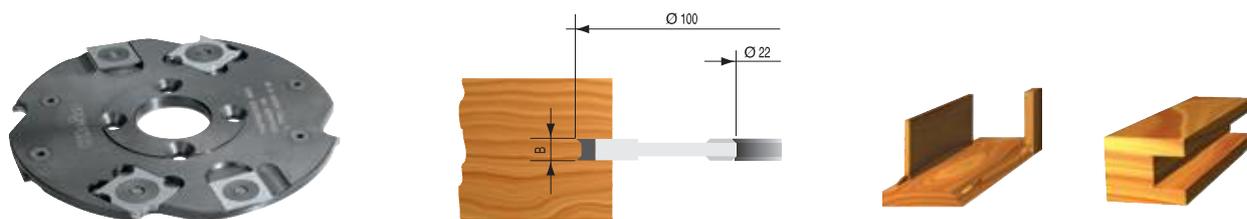

- For "Lamello" biscuit jointers on any kind of wood
- Cutterhead in steel with reversible HW knives and spurs
- Manual feed (MAN)


Item	D	d	B	Z	V
TAH100.20622	100	22	4	4	4

Spare parts:

	Dimension	Item
Knife	18x18x1,5	Z055.020.N
Knife screw	M4x3,2	Z051.700.R
Threaded ring	12x1,7	Z060.701.R
Spur	14x14x1,2	Z055.006.N
Spur screw	M4x3,2	Z051.700.R
Threaded ring	10x1,65	Z060.700.R

HW ADJUSTABLE CUTTERHEAD WITH REVERSIBLE KNIVES FOR GROOVES

ART. TB

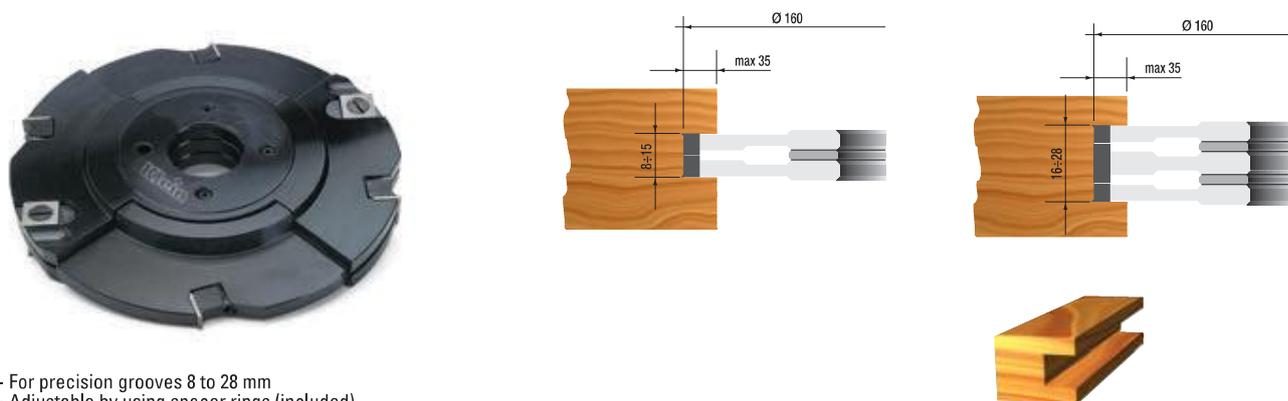

- For precision grooves 8 to 28 mm
- Adjustable by using spacer rings (included)
- Cutterhead in steel with reversible HW knives
- Manual feed (MAN)



Item	D	d	B	Z	V	E _{max}
TB160.15030 A+A	160	30	8÷15	4	4	35
TB160.15035 A+A	160	35	8÷15	4	4	35
TB160.15040 A+A	160	40	8÷15	4	4	35
TB160.15130 B	160	30	15	2	-	35
TB160.15135 B	160	35	15	2	-	35
TB160.15140 B	160	40	15	2	-	35
TB160.28030 A+B+A	160	30	8÷28	4+2	4	35
TB160.28035 A+B+A	160	35	8÷28	4+2	4	35
TB160.28040 A+B+A	160	40	8÷28	4+2	4	35

Spare parts:

	Dimension	TB160.150	TB160.151
Knife	7,65x12x1,5	Z055.000.N	Z055.002.N
Wedge	6,8	Z056.700.N	Z056.701.N
Wedge screw	M5x18	Z051.800.R	Z051.801.R
Spur	14x14x2	Z055.007.N	
Spur screw	M5x7	Z051.701.R	

HW ADJUSTABLE GROOVING CUTTERHEAD FOR TENONS

ART. TC

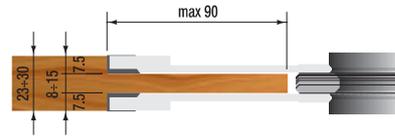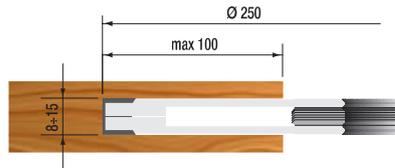

- For precision tenons 8 to 15 mm
- Adjustable by using spacer rings (included)
- Cutterhead in steel with reversible HW knives and spurs
- Manual feed (MAN)




Item	D	d	B	Z	V	E _{max}
TC250.15030	250	30	8-15	4	4	100

Spare parts:

	Dimension	Item
Knife	7,6x12x1,5	Z055.000.N
Wedge	6,8	Z056.700.N
Wedge screw	M5x18	Z051.800.R
Spur	14x14x2	Z055.007.N
Spur screw	M5x7	Z051.701.R

HW CUTTERHEAD WITH REVERSIBLE STRAIGHT KNIVES AND SPURS

ART. TEL

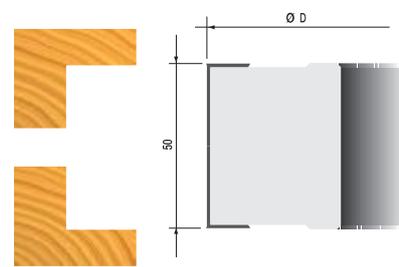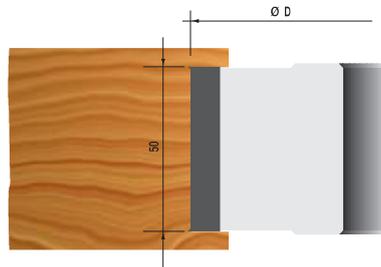

- Cutterhead for precision rebating straight cut
- Light alloy with reversible HW knives and spurs
- Manual feed (MAN)

Item	D	d	B	Z	V
TEL100.50030	100	30	50	2	4
TEL100.50035	100	35	50	2	4
TEL125.50040	125	40	50	2	4
TEL125.50050	125	50	50	2	4

Spare parts:

	Dimension	Item
Knife	50x12x1,5	Z055.010.N
Wedge	46	Z056.702.N
Wedge screw	M8x16	Z051.810.R
Spur	14x14x2	Z055.007.N
Spur screw	M5x7	Z051.701.R